



JLA ARCHITECTS + PLANNERS  
800 W Broadway – Suite 200  
Monona, Wisconsin 53713  
[www.jla-ap.com](http://www.jla-ap.com)

September 23, 2020

Erin Ruth  
Village of Cottage Grove – Depart of Planning & Zoning  
221 E Cottage Grove Road  
Cottage Grove, WI 53527

re: Precise Implementation Plan/PUD Submittal for Glen Grove Apartments

Dear Erin,

Enclosed you will find our submittal for the PIP/PD review of our Planned Unit Development at the October 14<sup>th</sup>, 2020, Planning Commission meeting. This project proposes a multi-family apartment building owned and operated by Movin' Out, Inc., with a specific program targeted at families with members who are disabled and veterans.

The PIP submittal reflects comments received from Village of Cottage Grove Staff, MSA Engineering, as well as comments received during the public hearing and GDP review.

Although an exterior lighting was not on the list of requirements, I have again included some samples of typical lighting we see on similar projects. This will be finalized with the exterior lighting plan that would be submitted for issuance of permits.

The landscaping plan included is still preliminary as we wait for the final storm water design. The bio-retention pond on the south side of the property is part of that system but will have extensive landscaping as well. The final size of it is yet to be determined, delaying the final landscaping plan. This will be part of the final engineering plans submitted to the city for approval.

Please look at the submittal and let me know if you need additional information or if you have any questions.

A handwritten signature in blue ink that reads "Andy Chitwood".

Andy Chitwood  
Project Manager  
JLA Architects & Planners

# GLEN GROVE APARTMENTS MULTI-FAMILY DEVELOPMENT

COTTAGE GROVE, W I S C O N S I N



CONTENTS:

- PAGE 3 PROJECT LOCATION & GENERAL DESCRIPTION
- PAGE 4 COMPREHENSIVE PLAN COMPATABILITY
- PAGE 5 RATIONALE FOR A PLANNED DEVELOPMENT DISTRICT
- PAGE 6 ENVIRONMENTAL BENEFITS OF PLANNED UNIT DEVELOPMENT ZONING
- PAGE 7 LAND USE
- PAGE 8 SITE DESIGN AND GENERAL INFORMATION
- PAGE 9 PLANNED UNIT DEVELOPMENT DESIGN STANDARDS AND EXEMPTIONS
- PAGE 10 APPENDIX 'A' – CONCEPTUAL MASTERPLAN AND SITE PLANS, AREA OWNER INFORMATION
- PAGE 11 APPENDIX 'B' – PRELIMINARY CIVIL AND LANDSCAPE PLANS
- PAGE 12 APPENDIX 'C' – PRELIMINARY FLOOR PLANS
- PAGE 13 APPENDIX 'D' – ELEVATIONS, PERSPECTIVES, AND CONTEXT
- PAGE 14 APPENDIX 'E' – SITE SIGNAGE AND LIGHTING

PROJECT TEAM:



MOVIN' OUT, INC.  
902 Royster Oaks Drive, Suite 105  
Madison, Wisconsin 53718  
Contact: Meagan Schuetz  
608.229.6910



JLA ARCHITECTS + PLANNERS  
800 W Broadway, Suite 200  
Monona, Wisconsin 53713  
Contact: Andy Chitwood  
608.442.3858



WYSER ENGINEERING, LLC  
312 E. Main Street  
Mt. Horeb, Wisconsin  
Contact: Wade Wyse  
608.843.3388

## PROJECT LOCATION & GENERAL DESCRIPTION

Glen Grove Apartments will be a quality community serving the increased demand for quality, higher density housing in the Cottage Grove area over the next five years and beyond. It will be located on what is an approximately 3.15 acre parcel. This community will be built and owned by Movin' Out Inc., a state-wide nonprofit housing organization whose mission is to provide affordable housing options to households that include a family member with a permanent disability and military veterans.

### Surrounding Context

The project site is in an urban neighborhood surrounded by existing businesses, elementary school, parks, and recreation areas, with a mix of residential apartments, townhouses, and homes. The property borders County Highway N on the east with ongoing development to the north. The property is located between Hwy N and N. Windsor Avenue, half of a block north of School Road. It will be able to utilize sewer, water, and storm water services that currently exist in the Village of Cottage Grove.

### Existing Topography

The project site has a change in elevation of about 10 feet from the northeast corner boundary, dropping to the southwest site boundary corner. There are no wetlands within the boundary of the parcel, and little to no existing vegetation. Extensive landscaping will be included as part of the project development.



CONSISTENCY WITH COMPREHENSIVE PLAN

This project is consistent with the Village of Cottage Grove's Comprehensive Plan. The following is a summary of how this project meets or advances the goals, objectives, and policies outlined in the Comprehensive Plan.

- 1) This project will address expected long range population growth with well built and affordable housing.
- 2) As an infill project this development will provide additional housing without destroying valuable natural resources such as woodlands and farm land.
- 3) As an infill project the development not require the building of any new roadways or interchanges.
- 4) Due to it's location, this building will be able to utilize existing municipal sewer, water, and storm water management systems.
- 5) The tenants of this development will be provided with continuing on site management and social services which will ensure a quality of life consistant with Village goals.
- 6) The location of this site makes it a short and safer walk to both Taylor Prairie Elementary School and Northlawn Park.

- 7) The construction of this project will utilize high quality design and materials, such as fiber cement siding and full size masonry, along with extensive landscaping.
- 8) The location of this project makes use of a long under used infill site.
- 9) The proposed development adds a new housing type to a neighborhood that contains single and small multi-family developments, adding to the diversity of housing types in the neighborhood.
- 10) To try and achieve a logical transition to the business to the south an approximately 40 ' buffer is being provided for additional landscaping barriers.

## RATIONALE FOR A PLANNED DEVELOPMENT DISTRICT

We believe there is a need to take advantage of the option for Planned Development District Zoning for the Glen Grove Apartments Development in order to accomplish the goals of providing a quality infill development and maintaining the more urban feel desired.

To accomplish these goals, we reference the City's eCode360 for the MR-12 zoning district as the most comparable standard zoning district with the following reasons:

- Section 325-40 (2) – Permitted Uses: This property is currently zoned PB Planned Business District. As such projects for residential housing are not allowed. The PUD would allow the proposed residential use of the property and provide the long term stability afforded under a permanent zoning classification.
- Section 325-38 (F) – Multifamily Residential-12: The MR-12 zoning district is the most comparable existing zoning district but designed to accommodate the construction of smaller structures than that proposed for this property. The establishment of a PUD would allow greater flexibility in providing a high quality design for the intended use.
- Section 325-38 (F)(6)(a) – Maximum Gross Density: Allowable MGD for this property is 12.00 dwelling units per acre. A PUD will allow the greater density required for this project to be successful.
- Section 325-38 (F)(6)(a) Maximum Landscape Surface Ratio: Current zoning requires a minimum LSR of 50%. The building proposed for the

site and the required parking will leave slightly less than the required 50% at approximately 43%.

- Section 325-38 (F)(6)(a) Maximum building coverage: Current zoning sets maximum building coverage on a lot at 30%. The proposed building would slightly over the maximum covering 33% of the site
- Section 325-38 (F)(6)(b) Minimum Setbacks: This section sets the setback requirements within the MR-12 zoning district. While we anticipate meeting the requirements at this point in the design process, we would like the ability to adjust those, with final approval, if necessitated by design.
- Section 325-38 (F)(6)(b) Maximum Building Height: MR-12 zoning sets maximum building height at 35'. With design features such as parapet walls and grade considerations we expect the building to be approximately 40' high from grade in some areas.
- Section 325-49 (A)(1)(g)(1) Parking Requirements: This portion of the zoning code requires 2.5 spaces per 3 bedroom unit, and 2 spaces per 2 and 1 bedroom units. Our experience designing this type of building, together with the owner's experience with the targeted tenants needs, indicates that less than that is required to meet the projects needs. While we will be providing a sufficient number of spaces, both covered and surface, for the tenants and their guests, we need the flexibility to do so that a PUD would provide.

## ENVIRONMENTAL BENEFITS OF PLANNED DEVELOPMENT ZONING

The Environmental Benefits of using Planned Unit Development District Zoning for this project come from the greater flexibility in both density & zoning standards that is allowed under PDD Zoning than would be allowed under the Village's High Density Residential Zoning.

### Reduction of Sprawl

Because of PUD Zoning, more units can be developed on this site. Therefore, this development can help meet the increasing need for residential units on less land area than would otherwise be required under the City's High Density Residential Zoning.

### Less Impervious Surface Area

Because of PUD Zoning, there is greater flexibility in the amount of vehicular parking that must be provided on site. In our Development Team's experience, the parking requirements of the Village's MR-12 Residential Zoning District are excessive for this project - and would result in more impervious surface area across the site than what our plan proposes. Utilizing PUD Zoning for this project will decrease run-off and allow additional landscaped areas.

### Enhanced Public Realm

With PUD Zoning, the site can be designed to enhance the character and visual aesthetics of the public realm. Under PUD Zoning, the building setbacks can be reduced to allow the buildings to be located & orientated to address the street edge and to help define the public realm. This also provides additional land area behind the buildings - so surface parking can be kept to the interior of the site and reduce its visual impact on the public streets.

LAND USE

When complete, this project will contain multi-family residential use. This 3.15 acre parcel will be consistent with the Village's Comprehensive Plan with a High Density Multi-Family Residential Use. It will have 100 affordable housing units along with their associated common amenity spaces. At the time of this General Development Plan, the mix of residential units is as follows:

- 1 Bedroom Units: 15%
- 2 Bedroom Units: 40%
- 3 Bedroom Units: 45%

Within each unit type there will be a variety of unit sizes - with an average unit size of approximately 771 square feet. This mix of unit types & sizes will serve a variety of potential residents.

In addition to the residential units themselves, the project will contain various common space amenities integrated within the building or around the site. At the time of this General Implementation Plan, the anticipated common amenities are:

- On-site Management/ Leasing Office
- Community Room with Common Space Access
- Exterior Common Space with the Following Amenities:
  - Extensive Landscaping
  - Children's Play Area
  - Gathering Area for Tenant Use
  - Raised Bed Garden Plots for Tenant Use
- Fitness Center
- Other Green and/or Open Space for passive and active activities

BUILDING DATA										PARKING PROVIDED				
FLOOR	UNITS					LEASABLE	COMMON				COVERED	SURFACE	RATIO	BIKES*
	1BR	2BR	3BR	TOTAL	BR'S	S.F.	S.F.	GSF	EFF					
3	5	14	15	34	78	36,719	5,930	43,862	81.40%					
2	5	14	15	34	78	36,719	5,930	43,862	81.40%					
1	5	12	15	32	74	34,486	7,012	43,862	79.60%					
LL								43,862						
T	15	40	45	100	230	107,924	18,872	126,796	92.00%	128	69	1.97/U	106	
%	15%	40%	45%										.86/BR	

\*NOTE: INCLUDES (40) COVERED SURFACE STALLS; (40) COVERED WALL-HUNG STALLS; (26) EXTERIOR SURFACE STALLS

GLEN GROVE APARTMENTS - DEVELOPMENT VALUES – AS OF SEPTEMBER 20, 2020						
ZONING REQUIREMENT	CURRENT DESIGN VALUE		CALCULATIONS			
SITE DENSITY	31.75	Units/Acre	100	Units	/	3.15 AC. = 31.75
BUILDING COVERAGE	29.67%	of Parcel	40,712	S.F.	/	137,214 S.F. = 29.67%
LANDSCAPE AREA	41.44%	of Parcel	56,863	S.F.	/	137,214 S.F. = 41.44%
IMPERVIOUS SURFACE	28.89%	of Parcel	39,639	S.F.	/	137,214 S.F. = 28.89%
FLOOR AREA RATIO	0.92%	of Parcel	126,796	S.F.	/	137,214 S.F. = 0.92%

## SITE DESIGN & GENERAL INFORMATION

The Masterplan for THE Glen Grove Apartments Development has been thoughtfully designed to address numerous site challenges including the existing topography and project identity.

### Masterplan Design Highlights:

- The building is located & orientated to address the street edge and to help define the public realm.
- Surface parking is kept to the interior of the site to reduce its visual impact from the public streets.
- Pedestrian pathways not only connect the site internally, but also connect the project site with adjacent parcels.
- The site contains dedicated open space containing play/gathering areas, and raised garden beds, for tenant use.

### Off Street Parking:

The **Village's** typical parking requirements require 2.0/2.5 parking stalls per residential dwelling unit. Based on our experience with multi-family developments, and considering the unit mix, we find that this requirement would be excessive. Therefore, we are proposing a minimum of 1.75 parking stalls per dwelling unit. This includes 128 interior parking stalls as well as 69 surface spaces. We believe that providing this level of parking will be appropriate for this project and will minimize the visual impact of surface parking lots on the site and the surrounding areas.

### Bicycle Parking:

In addition to off-street vehicular parking, we are providing a minimum of 80 bicycle storage spaces in the lower level, as well as 26 exterior surface spaces.

### Landscape Design:

The new landscape design for this project will meet all Village of Cottage Grove landscape design requirements. Please see Appendix 'B' of this document for the Preliminary Landscape Plan. This plan will be further developed, and additional detail and information will be provided with the development of the civil engineering plans. As the storm water management plan is developed, the bio-retention pond on the south side of the property, which will be sized accordingly, will have landscaping that is conducive to an environment that is periodically wet, such as rain garden type landscaping.

### Refuse & Recycling Storage & Removal:

This building will have two refuse & recycling rooms for tenant convenience, located in the Lower Level. One will be located at each end of the building. A private waste management company will be contracted to provide recycling & refuse services as appropriate for the development.

### Precise Implementation Plan Data

At the time of this Precise Implementation Plan, the Masterplan Data is as shown. This data is consistent with the data submitted in the GDP as well as the information listed in the Village of Cottage Grove Staff Recommendations, and comments from the MSA engineering review.

Planned Unit Development Zoning Standards

Under the proposed Planned Development Zoning, the project shall follow the Zoning Standards listed in the General development Submittal, as well as those listed in the Village of Cottage Grove Staff Recommendations, and MSA review.

- Building Height: Maximum of 3.5 Stories and 45'
- Residential Density: 35 units per acre (maximum)
- Front Street Setback: 15' (minimum)  
Exterior Stairs, Entry Stoops, Planters, and overhangs are permitted to encroach within this Setback
- Side Street Setback: **5' (minimum)**  
Exterior Stairs, Entry Stoops, Planters, and overhangs are permitted to encroach within this Setback
- Side Yard Setback: 5' (minimum)  
Exterior Stairs, Entry Stoops, Planters, and overhangs are permitted to encroach within this Setback
- Rear Yard Setback: **35' (minimum)**  
Exterior Stairs, Entry Stoops, Planters, and overhangs are permitted to encroach within this Setback
- Building Coverage: 35% of Parcel Area (maximum)
- Floor Area Ratio: 1.25 (maximum)
- Impervious Surface Ratio: 28% of Parcel Area (Less Building) (maximum)
- Off-Street Parking: 1.75 Auto Spaces per Dwelling Unit (minimum)

Staff Recommendations

- The building height may exceed 35' per the submitted elevations
- The landscape ratio may be less than 50% as shown on the submitted site plan.
- The floor area ratio may exceed 0.275 as shown on the submitted site and building plans.
- The building coverage may exceed 30% as shown on the submitted site plan.
- The number of parking spaces may be as shown on unit data table.
- All signage will require a permit prior to installation.

The following MSA comments will be addressed with the submittal of final civil engineering plans, this submittal, and the signage permit application

- The sidewalk along highway N will be moved to the right of way to match the future sidewalks on adjoining property.
- A 6" watermain connection is planned along the north property line from the existing Village 16" main. Existing services are 2" that are stubbed to the lots.
- A clean out or manhole should be located within the property where the connection to the 8" sanitary service stub and 6" sanitary lateral to the building is shown.
- The signs appear to exceed Village ordinance.
- Stormwater appears to be planned for underground storage and a bioretention basin which seems appropriate for the planned site.

Proposed Exemptions From Underlying Zoning District (MR-12)

Following are items for which an exemption would be requested from the requirements of the underlying zoning district.

- The current limitation of 12 dwelling units per acre
- The current landscape ratio of 50%
- The current maximum building coverage of 30%
- The maximum height limitation of 35'
- The current setback requirements as outlined above
- The current parking ratios as outlined above

APPENDIX “A”  
PRECISE IMPLEMENTATION PLAN  
MASTER PLAN, LOCATIONMAP, VICINITY MAP, RESIDENT LIST

---



**BUILDING A1**  
3 STORIES  
100 UNITS  
43,862 GSF

157  
PARKING  
SPACES

SWM


COUNTY TRUNK HIGHWAY N

NORTH WINDSOR AVE

PARADOR PLACE

CHATEAU DRIVE



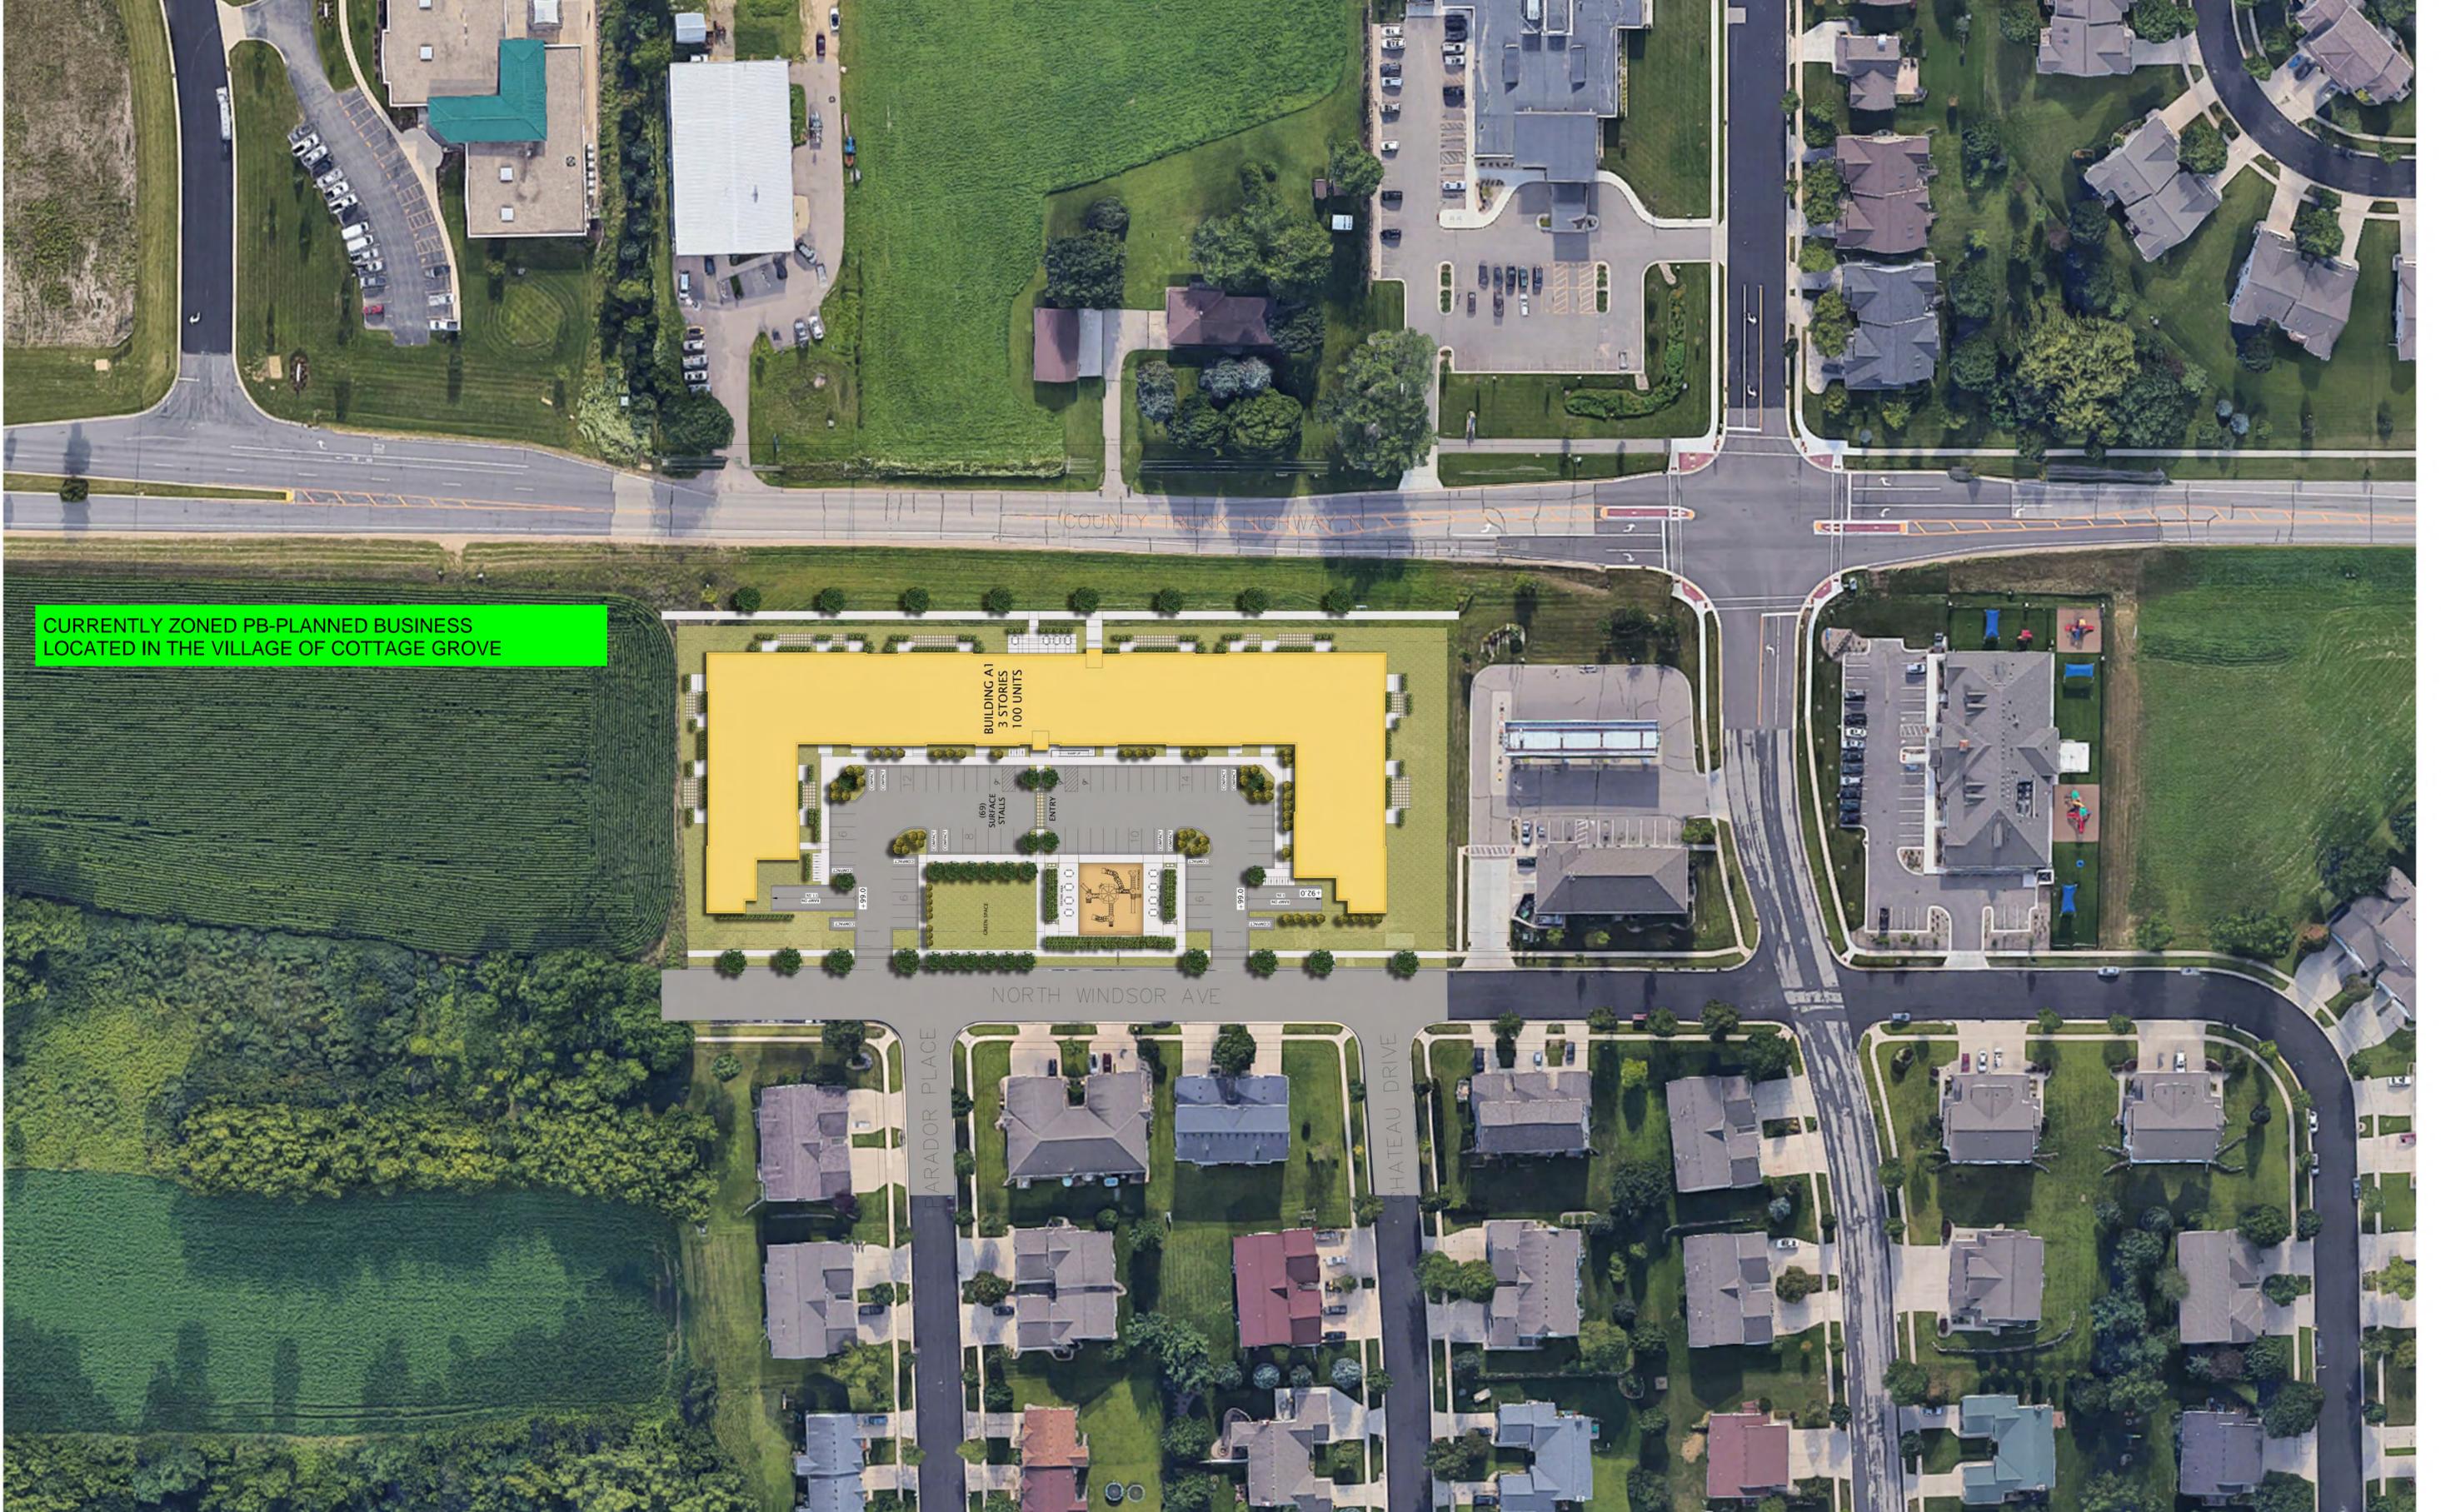

CURRENTLY ZONED PB-PLANNED BUSINESS  
LOCATED IN THE VILLAGE OF COTTAGE GROVE




**JLA**  
ARCHITECTS

# MOVIN' OUT INC. – GLEN GROVE APARTMENTS

## MASTERPLAN & DENSITY STUDY – CONTEXT PLAN

AUGUST 19, 2020  
1" = 50' @ 24" x 36"  
1" = 100' @ 12" x 18"



OWNERS OF PROPERTY LOCATED WITH IN 300' OF SUBJECT PROPERTY  
AS PROVIDED BY THE VILLAGE OF COTTAGE GROVE

NAME	ADDRESS
Dwight Huston	2561 Coffeytown Road
KLM Grove Holdings	401 Tyanna Court
Landmark Services Cooperative	PO Box 277
Dennis Viney	3707 County Highway N
Jeffrey Bowers	4600 County Highway N
Live Grove LLC	2248 Deming Way, Suite 200
McFarland Meadows LLC	1972 Barber Drive, #5
3 Willow Lake LLC	1972 Barber Drive, #3
MDC Coast 16 LLC	650 NE Holladay Street, Suite 1400
Stop N Go of Madison, Inc.	2934 Fish Hatchery Road
Property Owner	6701 Raymond Road
Weber & Weber II LLC	PO Box 10 C
Property Owner	2022 Koshkonong Road
Property Owner	1238 Van Ells Way
Schleif Rev. Tr., Dean & Helen	208 Chateau Drive
Nicole Mathweg	216 Chateau Drive
Jeffrey Miller & Stephanie Smith-Miller	218 Chateau Drive
L Connor LLC	1201 Windsor Avenue
Matthew & Jennifer Kornstedt	207 Dunkel Court
Jeffrey Gladem & Therese Ott	217 Chateau Drive
Constance Dreger & Chandra Kleinsmith	5474 Patriot Way
Property Owner	PO Box 258
Bruce Langer	776 Hemphill Avenue
BZ Living Tr.	216 Parador Place
Richard & Catherine Schmitz	818 N. Parkview Street
Leonard & Martha Kaplan	1410 Seminole Highway
Judah Rinzel	217 Parador Place
Jessica Grosso	4648 Meadowlark Street



**VIEW FROM SW1**

**GLEN GROVE APARTMENTS**



Google Earth

© 2020 Google

100 ft



**VIEW FROM NE**  
**GLEN GROVE APARTMENTS**



APPENDIX 'B'  
PRECISE IMPLEMENTATION PLAN  
PRELIMINARY CIVIL SITE, &  
LANDSCAPE PLANS








**CERTIFIED SURVEY MAP NO. \_\_\_\_\_**

A CONSOLIDATION OF LOTS 86, 87, AND 88 OF FIRST ADDITION TO NORTHLAWN ESTATES RECORDED ON OCTOBER 1, 1996 IN VOLUME 57-61A OF PLATS ON PAGES 243-244 AS DOCUMENT NO. 2800152, BEING A PART OF THE NORTHEAST QUARTER OF THE SOUTHWEST QUARTER OF SECTION 4, TOWN 7 NORTH, RANGE 11 EAST, VILLAGE OF COTTAGE GROVE, DANE COUNTY, WISCONSIN.

**EXISTING EASEMENT DETAIL**

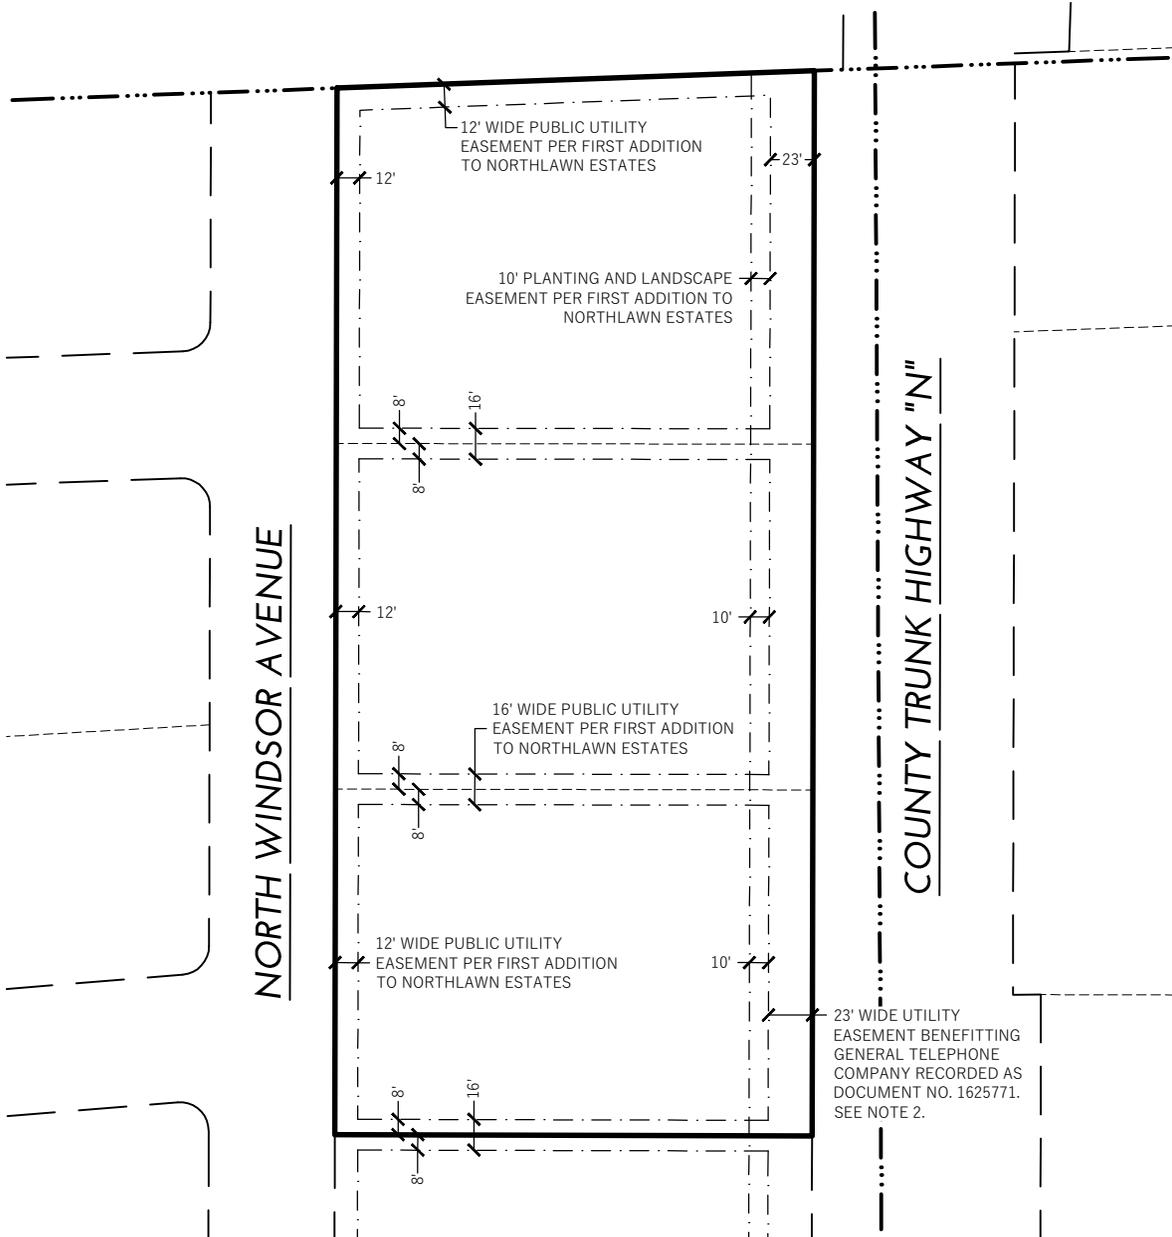


**LEGEND**

- CSM BOUNDARY
- RIGHT-OF-WAY LINE
- SECTION/QUARTER LINE
- PLATTED LINE
- EXISTING EASEMENT

**NOTES:**

1. THIS PARCEL IS SUBJECT TO ALL EASEMENTS AND AGREEMENTS, BOTH RECORDED AND UNRECORDED.
2. THE 23' WIDE UTILITY EASEMENT PER DOCUMENT NO. 1625771 WAS RECORDED PRIOR TO THE FIRST ADDITION OF NORTHLAWN ESTATES AND WAS WRITTEN AS A TWO-ROD (33 FEET) WIDE STRIP. THE FIRST ADDITION OF NORTHLAWN ESTATES DEDICATED AN ADDITIONAL 10 FEET OF RIGHT-OF-WAY TO COUNTY TRUNK HIGHWAY "N", RESULTING IN THE 23 FOOT WIDE EASEMENT SHOWN HEREON.

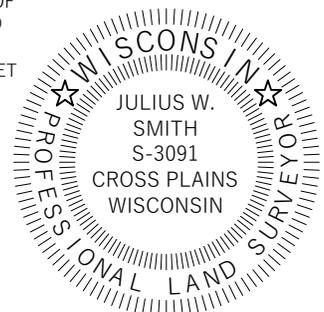

File: C:\Projects\200720\_JLA - Glen Grove - Cottage Grove, WI\DWG\200720-CSM.dwg Layout: CSM 2 OF 4 User: Zach Plotted: Aug 19, 2020 - 4:46pm

	PREPARED BY:	PREPARED FOR:	SURVEYED BY: MAL	VOL. _____ PAGE _____
	312 EAST MAIN STREET MOUNT HOREB, WI 53572 www.wyserengineering.com	MOVIN' OUT, INC. 902 ROYSTER OAKS DR., STE 105 MADISON, WI 53714	DRAWN BY: ZMR APPROVED BY: JWS	PROJECT NO: 200720 SHEET NO: 2 of 4



**CERTIFIED SURVEY MAP NO. \_\_\_\_\_**

A CONSOLIDATION OF LOTS 86, 87, AND 88 OF FIRST ADDITION TO NORTHLAWN ESTATES RECORDED ON OCTOBER 1, 1996 IN VOLUME 57-61A OF PLATS ON PAGES 243-244 AS DOCUMENT NO. 2800152, BEING A PART OF THE NORTHEAST QUARTER OF THE SOUTHWEST QUARTER OF SECTION 4, TOWN 7 NORTH, RANGE 11 EAST, VILLAGE OF COTTAGE GROVE, DANE COUNTY, WISCONSIN.

**OWNER'S CERTIFICATE**

MOVIN' OUT, INC., AS OWNER, WE HEREBY CERTIFY THAT WE CAUSED THE LANDS DESCRIBED HEREON TO BE SURVEYED, DIVIDED MAPPED AND DEDICATED AS SHOWN. I ALSO CERTIFY THAT THIS CERTIFIED SURVEY MAP IS REQUIRED BY S. 236.34 OF THE WISCONSIN STATE STATUES TO BE SUBMITTED TO THE VILLAGE OF COTTAGE GROVE FOR APPROVAL.

BY: \_\_\_\_\_  
MANAGING MEMBER  
MOVIN' OUT, INC.

STATE OF WISCONSIN) SS  
DANE COUNTY ) SS

PERSONALLY CAME BEFORE ME THIS \_\_\_\_\_ DAY OF \_\_\_\_\_, 2020, THE ABOVE NAMED

MANAGING MEMBER FOR MOVIN' OUT, INC., \_\_\_\_\_ TO ME KNOWN TO BE THE  
PERSON WHO EXECUTED THE FOREGOING INSTRUMENT, AND ACKNOWLEDGED THE SAME.

\_\_\_\_\_  
NOTARY PUBLIC, STATE OF WISCONSIN MY COMMISSION EXPIRES \_\_\_\_\_

**CONSENT OF MORTGAGEE**

\_\_\_\_\_, A BANKING ASSOCIATION DULY ORGANIZED AND EXISTING UNDER AND BY VIRTUE OF THE LAWS OF THE STATE OF WISCONSIN, MORTGAGEE OF THE ABOVE DESCRIBED LAND, DOES HEREBY CONSENT TO THE SURVEY, DIVIDING, MAPPING AND DEDICATION OF THE LAND DESCRIBED ON THIS CERTIFIED SURVEY MAP AND DOES HEREBY CONSENT TO THE OWNER'S CERTIFICATE.

BY: \_\_\_\_\_  
AUTHORIZED OFFICER

STATE OF WISCONSIN) SS  
DANE COUNTY ) SS

PERSONALLY CAME BEFORE ME THIS \_\_\_\_\_ DAY OF \_\_\_\_\_, 2020, THE ABOVE  
NAMED BANKING ASSOCIATION, \_\_\_\_\_ AUTHORIZED OFFICER


\_\_\_\_\_ TO ME KNOWN TO BE THE PERSON WHO EXECUTED THE FOREGOING  
INSTRUMENT, AND ACKNOWLEDGED THE SAME.

\_\_\_\_\_  
NOTARY PUBLIC, STATE OF WISCONSIN MY COMMISSION EXPIRES \_\_\_\_\_

**VILLAGE OF COTTAGE GROVE APPROVAL**

APPROVED FOR RECORDING PER THE VILLAGE BOARD OF THE VILLAGE OF  
COTTAGE GROVE ON THIS \_\_\_\_\_ DAY OF \_\_\_\_\_, 2020.

\_\_\_\_\_  
LISA KALATA, CLERK DATE \_\_\_\_\_  
VILLAGE OF COTTAGE GROVE

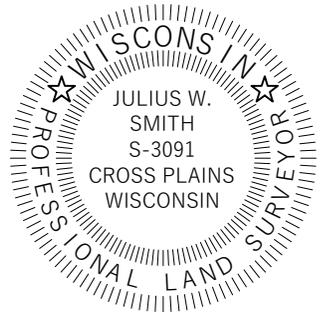

OFFICE OF THE REGISTER OF DEEDS  
\_\_\_\_\_  
COUNTY, WISCONSIN  
RECEIVED FOR RECORD \_\_\_\_\_,  
20 \_\_\_\_ AT \_\_\_\_\_ O'CLOCK \_\_\_\_ M AS  
DOCUMENT # \_\_\_\_\_  
IN VOL. \_\_\_\_\_ OF CERTIFIED SURVEY  
MAPS ON PAGE(S) \_\_\_\_\_  
\_\_\_\_\_  
KRISTI CHLEBOWSKI, REGISTER OF DEEDS

File: C:\Projects\200720\_JLA - Cien Grove - Cottage Grove, WI\DWG\200720-CSM.dwg Layout: CSM 4 of 4 User: Zach Plotted: Aug 19, 2020 - 4:51pm



PREPARED BY:  
312 EAST MAIN STREET  
MOUNT HOREB, WI 53572  
www.wyserengineering.com

PREPARED FOR:  
MOVIN' OUT, INC.  
902 ROYSTER OAKS DR., STE 105  
MADISON, WI 53714

SURVEYED BY: MAL  
DRAWN BY: ZMR  
APPROVED BY: JWS

PROJECT NO: 200720  
SHEET NO: 4 of 4


Revisions:

No.	Date:	Description:


Graphic Scale	
Wyser Number	20-0720
Set Type	PD SUBMITTAL
Date Issued	08/20/20
Sheet Number	L100

NORTH WINDSOR AVENUE

COUNTY TRUNK HWY "N"

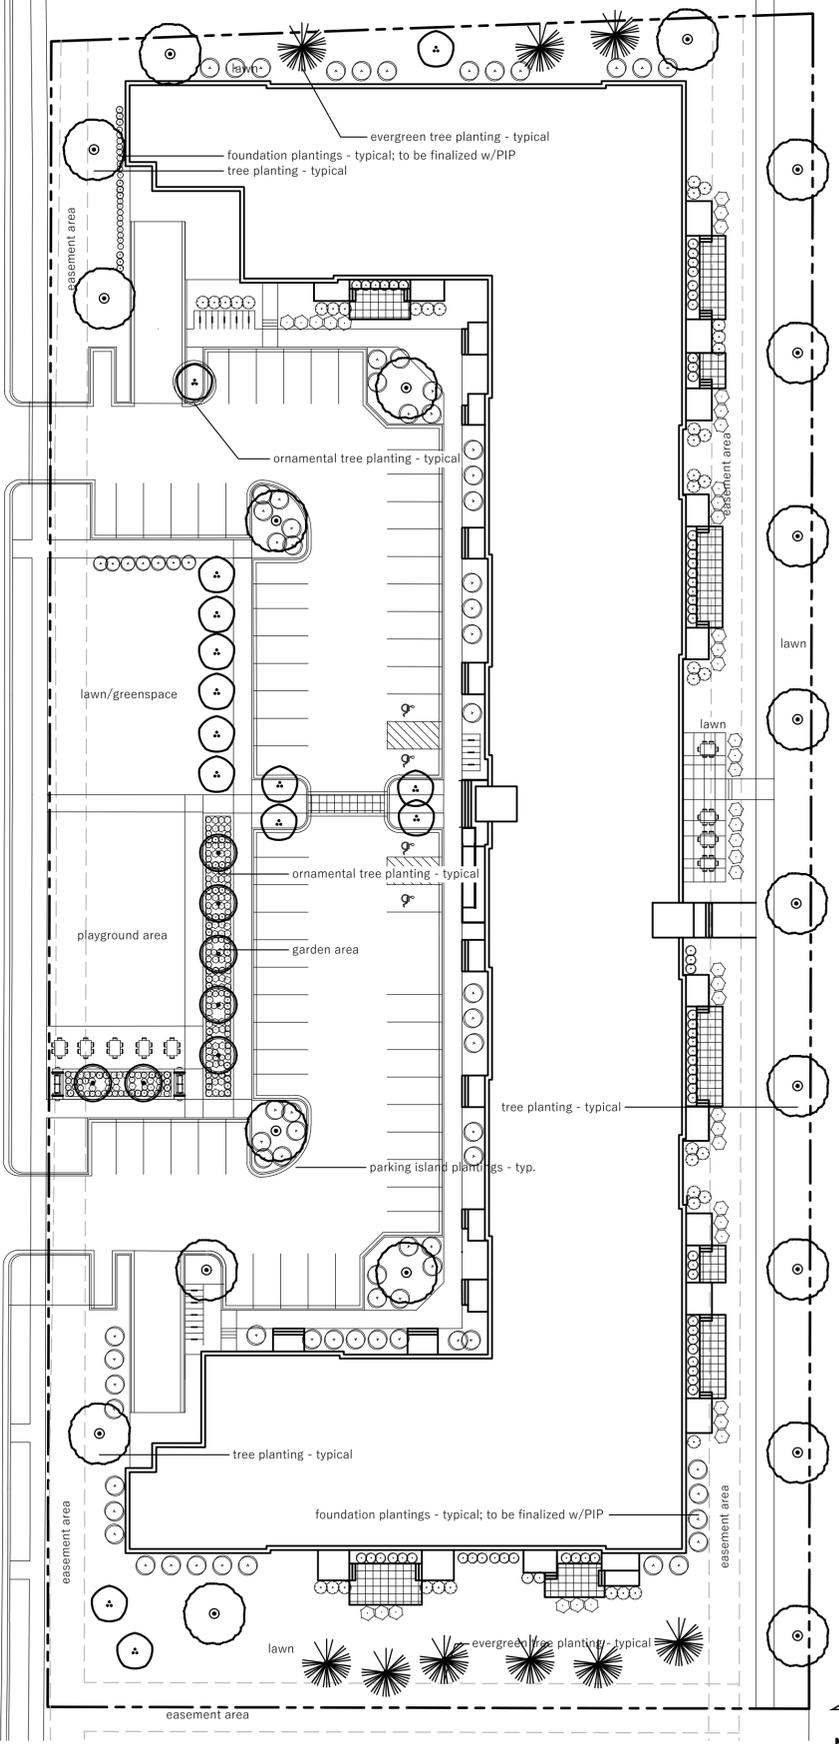

**1 GENERAL CONCEPTUAL LANDSCAPE PLAN**  
NOTE: TO BE FINALIZED WITH PRECISE IMPLEMENTATION PLAN



Zoning District: PB Planned Business - Landscaping Requirements for Regular Development

	Site	Min. Required Points
Linear Feet Building Foundations:	40 landscape points per 100 lf	X
Linear Feet of Street Frontage:	40 landscape points per 100 lf	X
Area of Paved Areas:	80 landscape points per 10,000 sf	X
Developed Lots:	10 landscape points per 1,000 floor area	X
Total Points Required		X
Required Bufferyard Opacity	NA	

Landscaping Points and Min. Installation Sizes:	Points	Proposed Qty.	Points
Plant Category	Min. size		
Climax Tree	2" cal.	X	X
Med. Deciduous Tree	6" tall	X	X
Low Evergreen Tree	3" tall	X	X
Low Deciduous Shrub	18" tall	X	X
Total Points Proposed		X	X

SUMMARY: X Points required/X Points proposed


**2 LANDSCAPE TABULATIONS**  
NOTE: TO BE FINALIZED WITH PRECISE IMPLEMENTATION PLAN




Notes:

- Individual tree and shrub groupings found within lawn areas are to receive wood mulch rings and/or wood mulch beds consisting of a mixture of recycled brown dyed wood mulch spread to a 3" min. depth over a pre-emergent herbicide.
- "Edging" to be professional grade polyethylene lawn edging available in 20' flat strips. Basis of Design: Valley View Black Diamond. Valley View Industries. ([www.valleyviewind.com/professional/](http://www.valleyviewind.com/professional/))
- "Lawn" areas shall be finish graded and seeded at a rate of 4 lbs. per 1,000 sq. ft. Basis of Design: Madison Parks Lawn Seed Mix. EarthCarpet Corporation. ([www.seedsolutions.com](http://www.seedsolutions.com))
- "Stone" to be clean washed 1 1/2" - 2 1/2" durable landscape stone spread to a 3" min. depth over a commercial grade weed barrier fabric.
- Contractor is responsible for repairing any and all damage to the adjacent properties. Planted areas shall be replanted, damaged lawn areas shall be repaired with sod and adjacent curbs and pavement shall be re-paved.
- Maintenance, watering and warranty of plants to extend for 12 months after project completion/acceptance. Maintenance, watering and warranty period for seed to extend 60 days from project completion/acceptance of installation.


**3 PLANT SCHEDULE AND NOTES**  
NOTE: TO BE FINALIZED WITH PRECISE IMPLEMENTATION PLAN

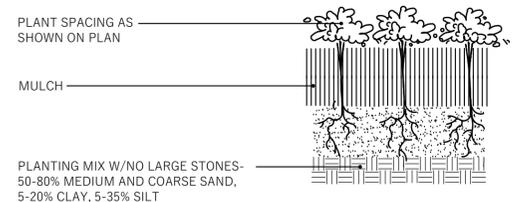


**4 PERENNIAL PLANTING**  
NTS

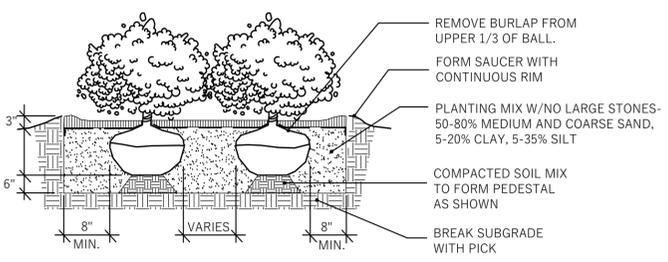

**5 SHRUB PLANTING**  
NTS

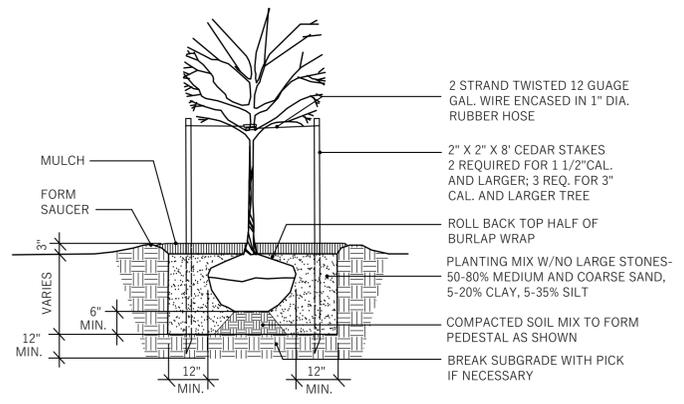


**6 TREE PLANTING**  
NTS

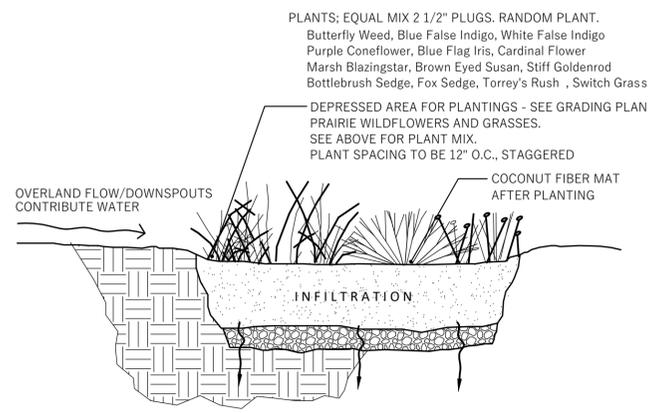

**7 BIORETENTION AREAS**  
NOTE: TO BE FINALIZED WITH PRECISE IMPLEMENTATION PLAN

APPENDIX 'C'  
PRECISE IMPLEMENTATION PLAN  
PRELIMINARY FLOOR PLANS

COUNTY TRUNK HIGHWAY N

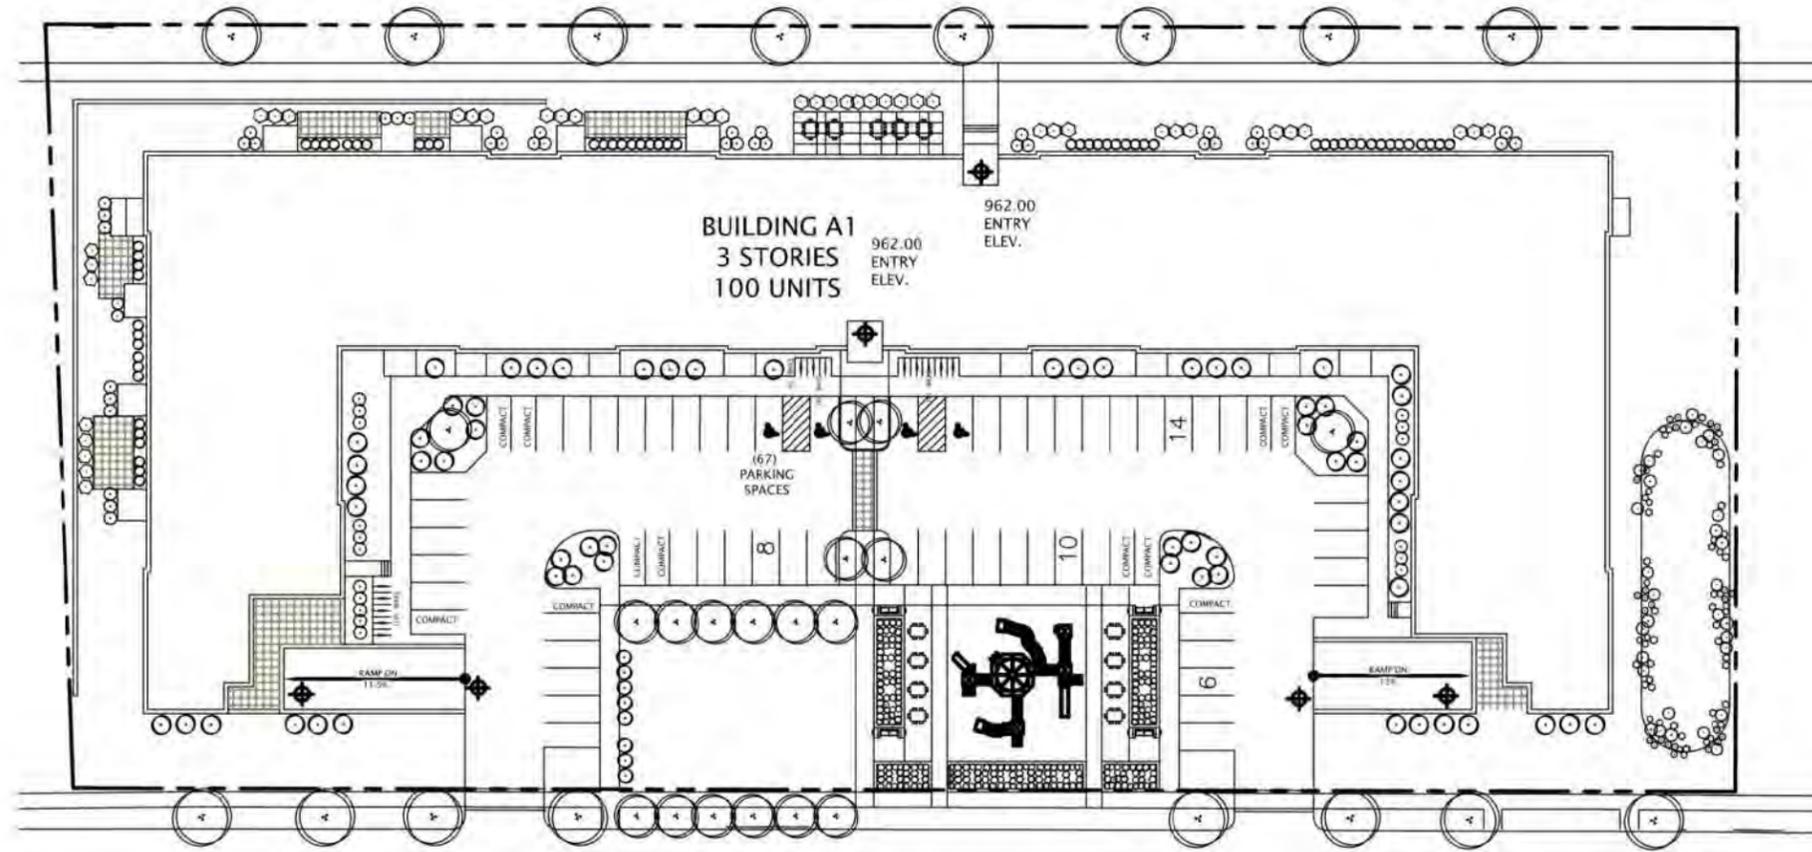



NORTH WINDSOR AVE


PARADOR PLACE

CHATEAU DRIVE



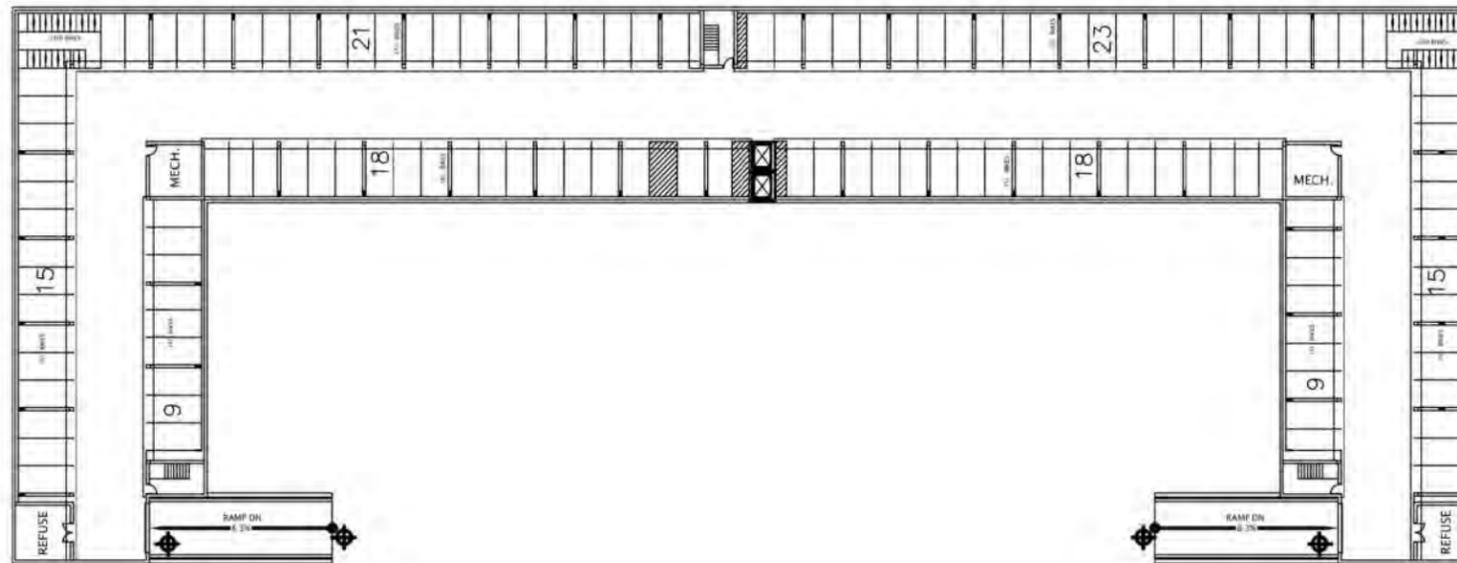

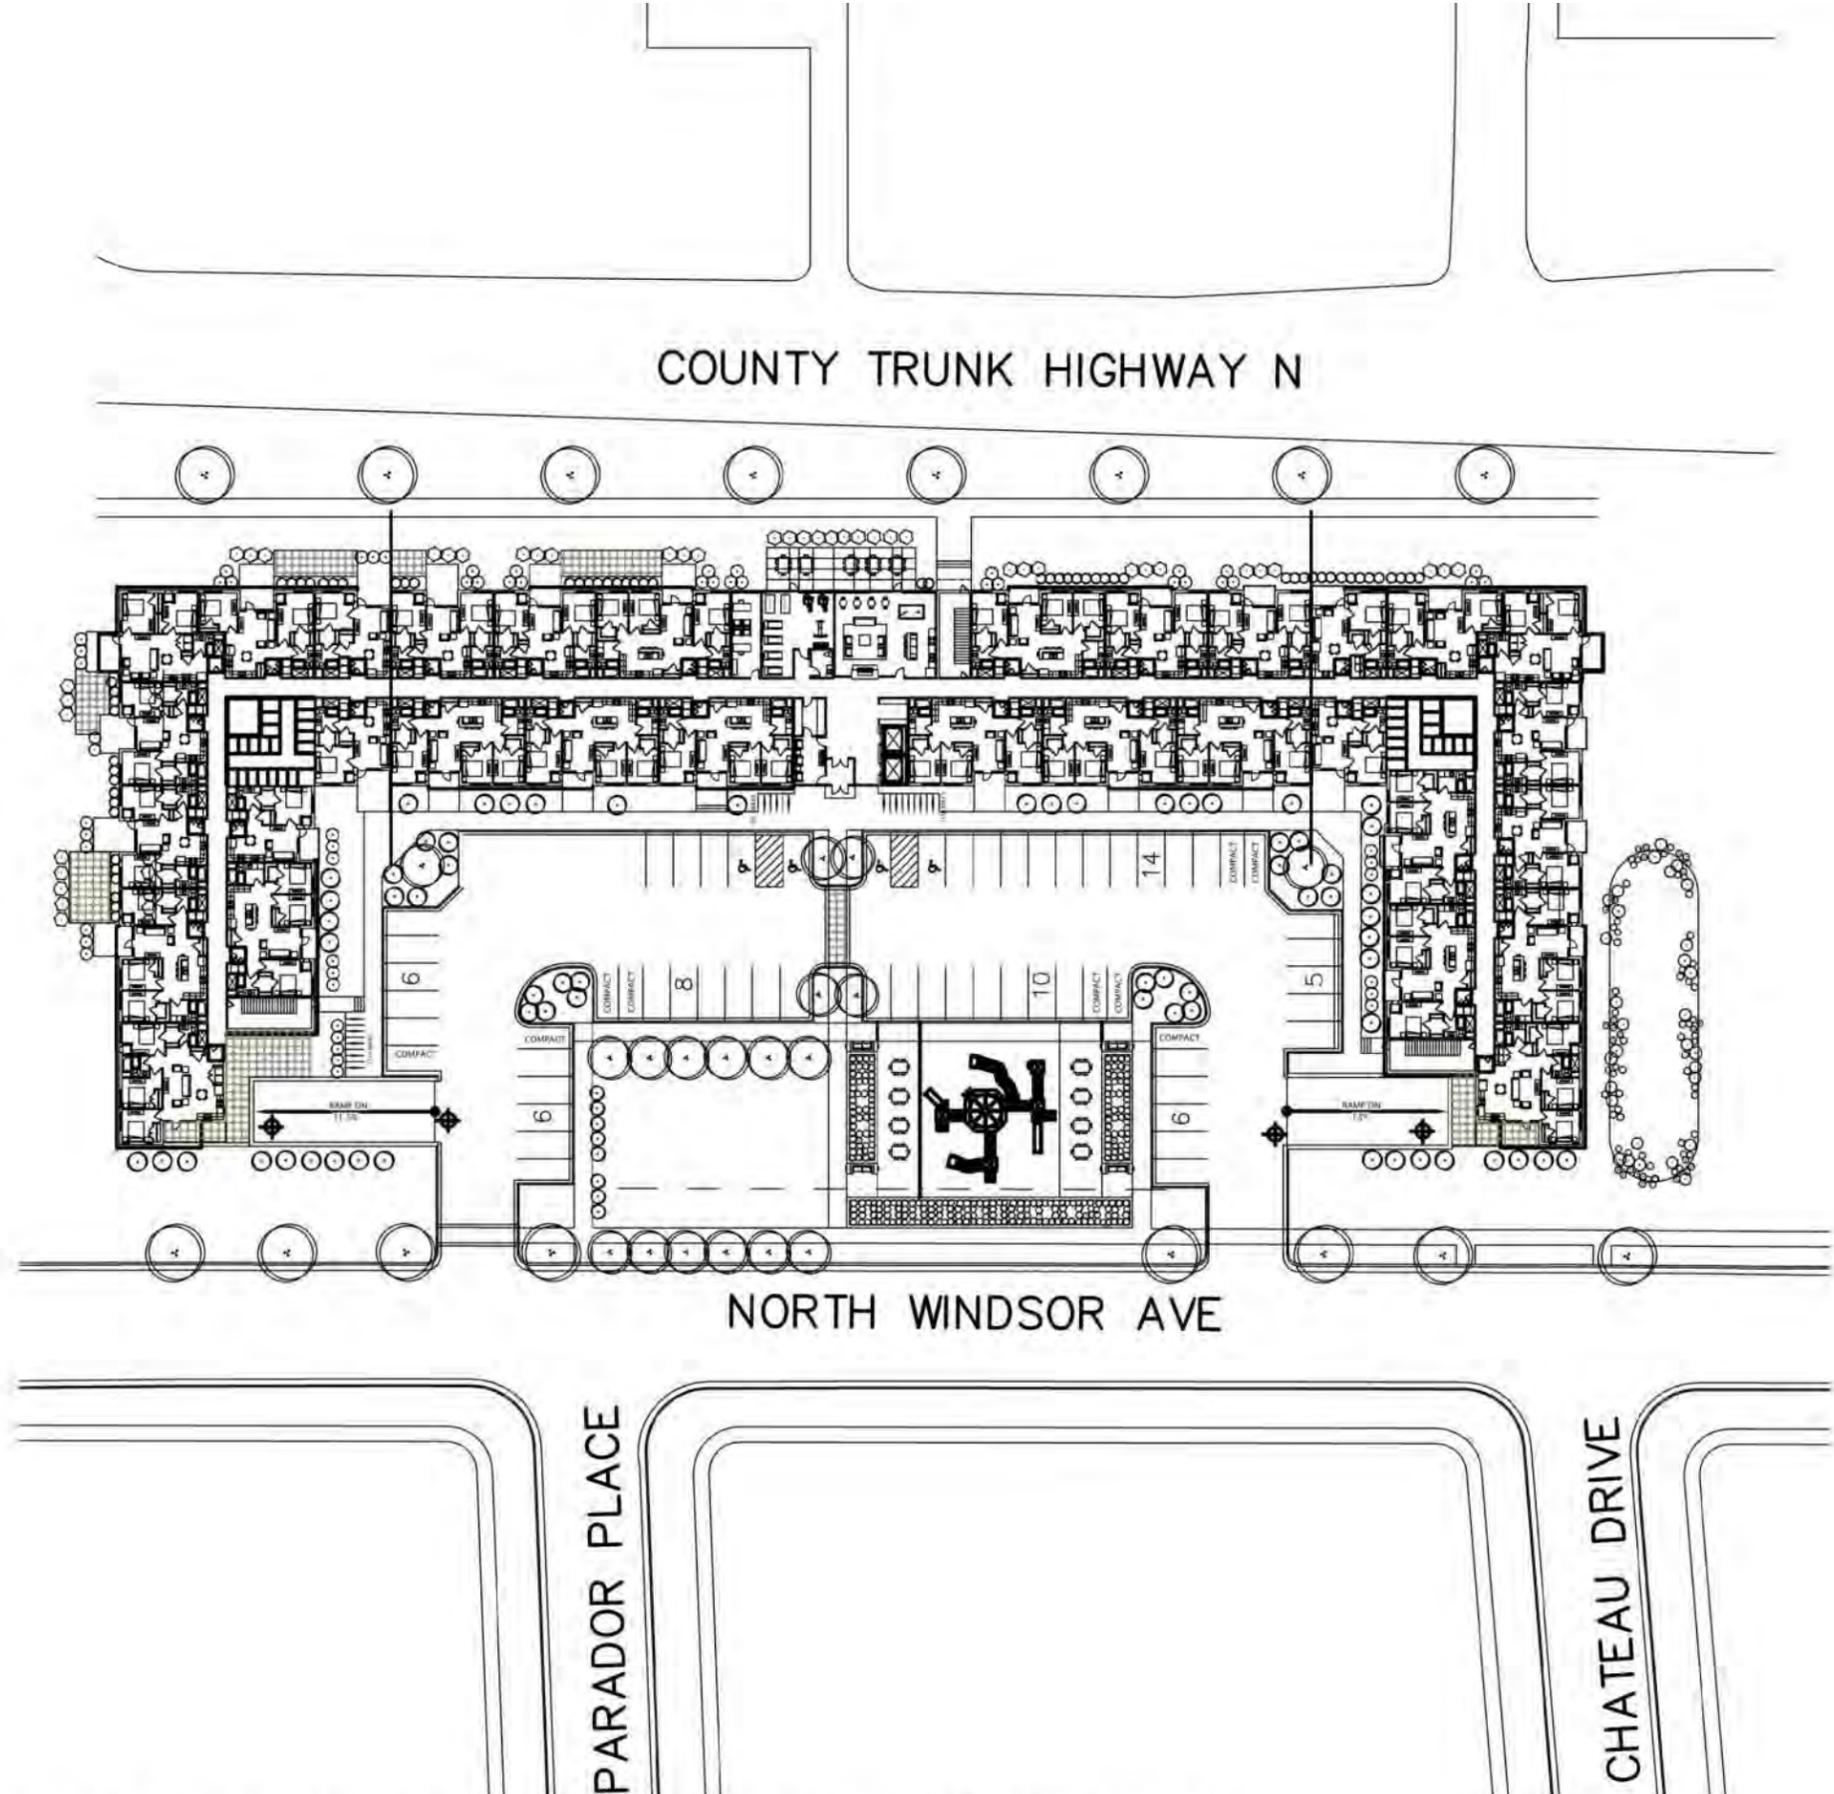

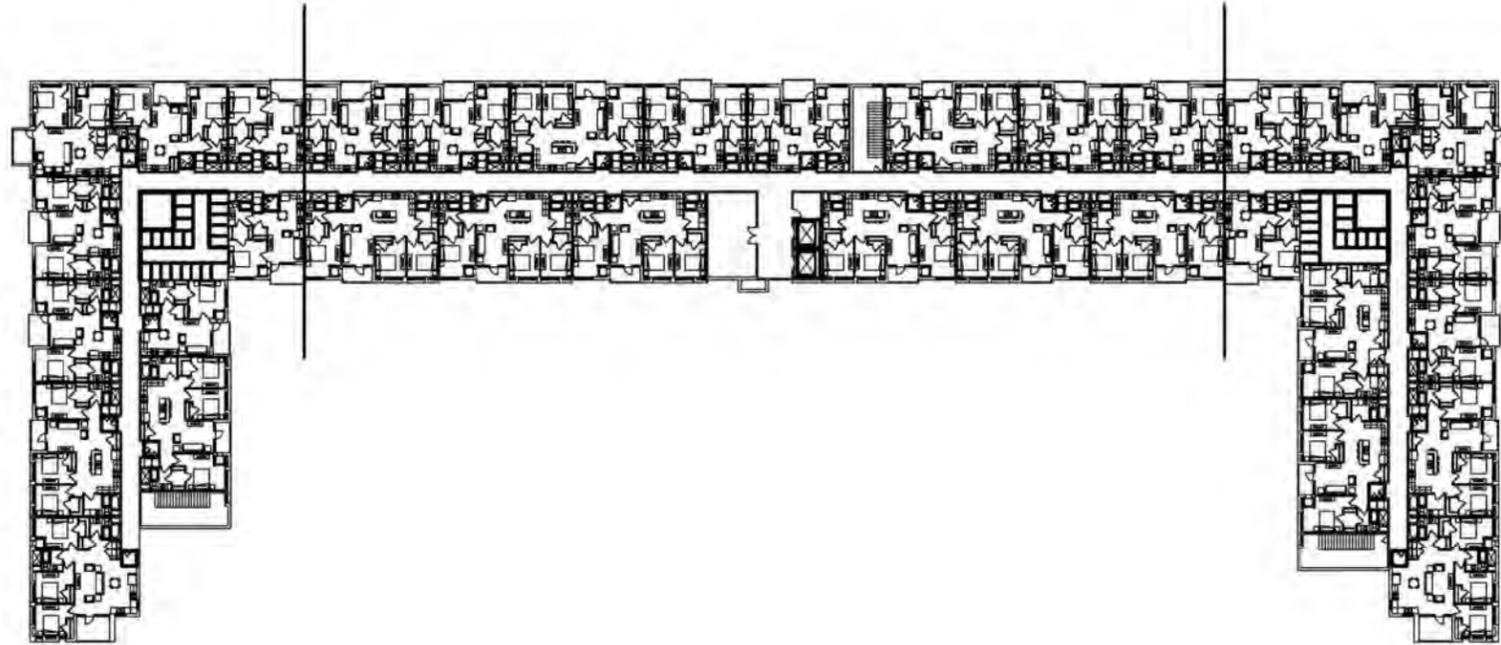

**JLA**  
ARCHITECTS

## MOVIN' OUT INC. – GLEN GROVE APARTMENTS

MASTERPLAN & DENSITY STUDY – SECOND & THIRD FLOOR PLAN (UNITS)

SEPTEMBER 15, 2020  
1"=60' @ 11x17



APPENDIX 'D'  
PRECISE IMPLEMENTATION PLAN  
ELEVATIONS, PERSPECTIVES, CONTEXT



DESCRIPTION	MANUFACTURER	TYPE / STYLE	DIMENSION	COLOR	NOTES
Fiber Cement Panel - 1	James Hardie	Select Cedarmill	4' x 8'	Woodtone Mountain Cedar	
Fiber Cement Panel - 2	James Hardie	Smooth	4' x 8'	Evening Blue	
Fiber Cement Panel - 3	James Hardie	Smooth	4' x 8'	Grey	
Fiber Cement Lap Siding - 1	James Hardie	Select Cedarmill	TBD	Aged Pewter	
Composite Windows/Doors	Lindsay Windows	Vinyl	TBD	Black/Bronze	
Masonry - 1	Interstate Brick	Utility	TBD	Ash	
HVAC Louver	TBD	Vented	TBD	TBD	
Balcony Fascia + Trim	TBD	TBD	TBD	TBD	
Balcony Railing	TBD	TBD	TBD	TBD	
Metal Wall Cap	TBD	TBD	TBD	TBD	




**JLA**  
ARCHITECTS

# MOVIN OUT - GLEN GROVE APARTMENTS

## WEST ELEVATIONS

DESCRIPTION	MANUFACTURER	TYPE / STYLE	DIMENSION	COLOR	NOTES
Fiber Cement Panel - 1	James Hardie	Select Cedarmill	4' x 8'	Woodtone Mountain Cedar	
Fiber Cement Panel - 2	James Hardie	Smooth	4' x 8'	Evening Blue	
Fiber Cement Panel - 3	James Hardie	Smooth	4' x 8'	Grey	
Fiber Cement Lap Siding - 1	James Hardie	Select Cedarmill	TBD	Aged Pewter	
Composite Windows/Doors	Lindsay Windows	Vinyl	TBD	Black/Bronze	
Masonry - 1	Interstate Brick	Utility	TBD	Ash	
HVAC Louver	TBD	Vented	TBD	TBD	
Balcony Fascia + Trim	TBD	TBD	TBD	TBD	
Balcony Railing	TBD	TBD	TBD	TBD	
Metal Wall Cap	TBD	TBD	TBD	TBD	

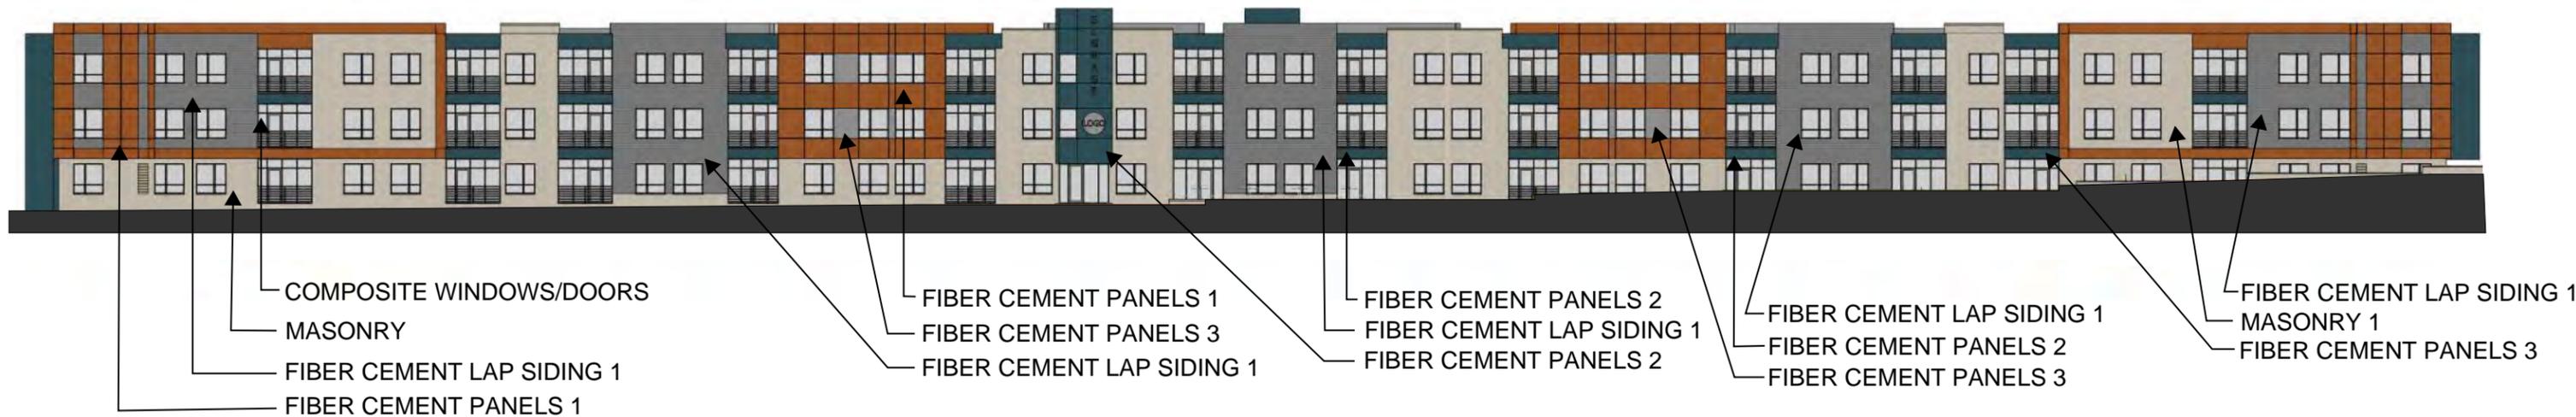


**JLA**  
ARCHITECTS


# MOVIN OUT - GLEN GROVE APARTMENTS

## EAST ELEVATIONS

DESCRIPTION	MANUFACTURER	TYPE / STYLE	DIMENSION	COLOR	NOTES
Fiber Cement Panel - 1	James Hardie	Select Cedarmill	4' x 8'	Woodtone Mountain Cedar	
Fiber Cement Panel - 2	James Hardie	Smooth	4' x 8'	Evening Blue	
Fiber Cement Panel - 3	James Hardie	Smooth	4' x 8'	Grey	
Fiber Cement Lap Siding - 1	James Hardie	Select Cedarmill	TBD	Aged Pewter	
Composite Windows/Doors	Lindsay Windows	Vinyl	TBD	Black/Bronze	
Masonry - 1	Interstate Brick	Utility	TBD	Ash	
HVAC Louver	TBD	Vented	TBD	TBD	
Balcony Fascia + Trim	TBD	TBD	TBD	TBD	
Balcony Railing	TBD	TBD	TBD	TBD	
Metal Wall Cap	TBD	TBD	TBD	TBD	

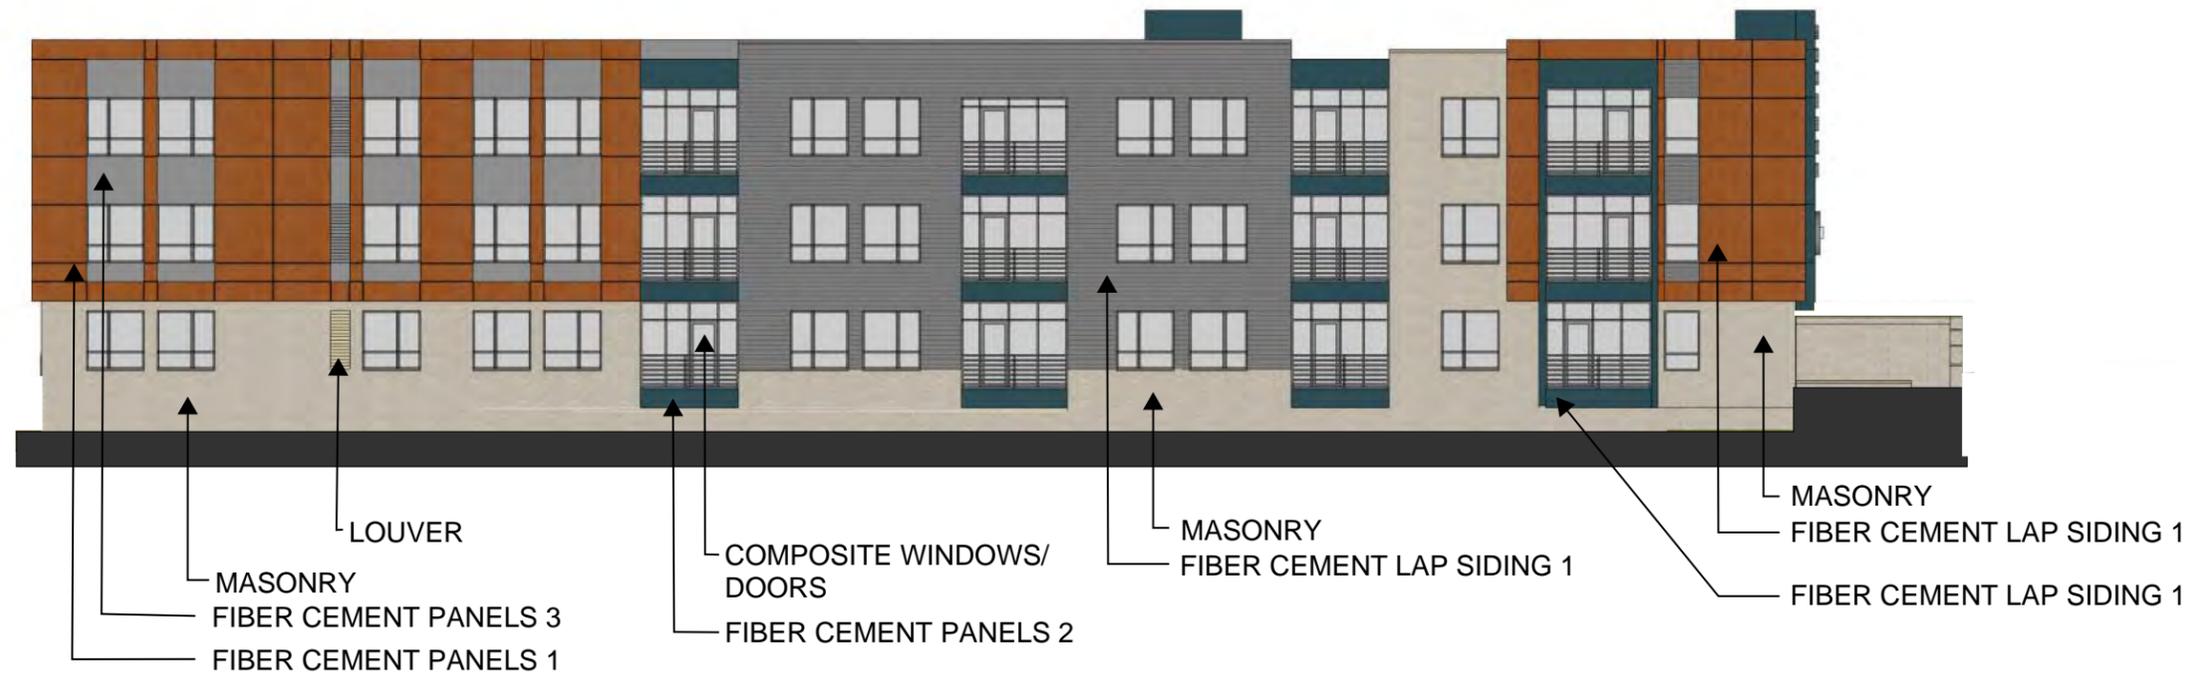

DESCRIPTION	MANUFACTURER	TYPE / STYLE	DIMENSION	COLOR	NOTES
Fiber Cement Panel - 1	James Hardie	Select Cedarmill	4' x 8'	Woodtone Mountain Cedar	
Fiber Cement Panel - 2	James Hardie	Smooth	4' x 8'	Evening Blue	
Fiber Cement Panel - 3	James Hardie	Smooth	4' x 8'	Grey	
Fiber Cement Lap Siding - 1	James Hardie	Select Cedarmill	TBD	Aged Pewter	
Composite Windows/Doors	Lindsay Windows	Vinyl	TBD	Black/Bronze	
Masonry - 1	Interstate Brick	Utility	TBD	Ash	
HVAC Louver	TBD	Vented	TBD	TBD	
Balcony Fascia + Trim	TBD	TBD	TBD	TBD	
Balcony Railing	TBD	TBD	TBD	TBD	
Metal Wall Cap	TBD	TBD	TBD	TBD	

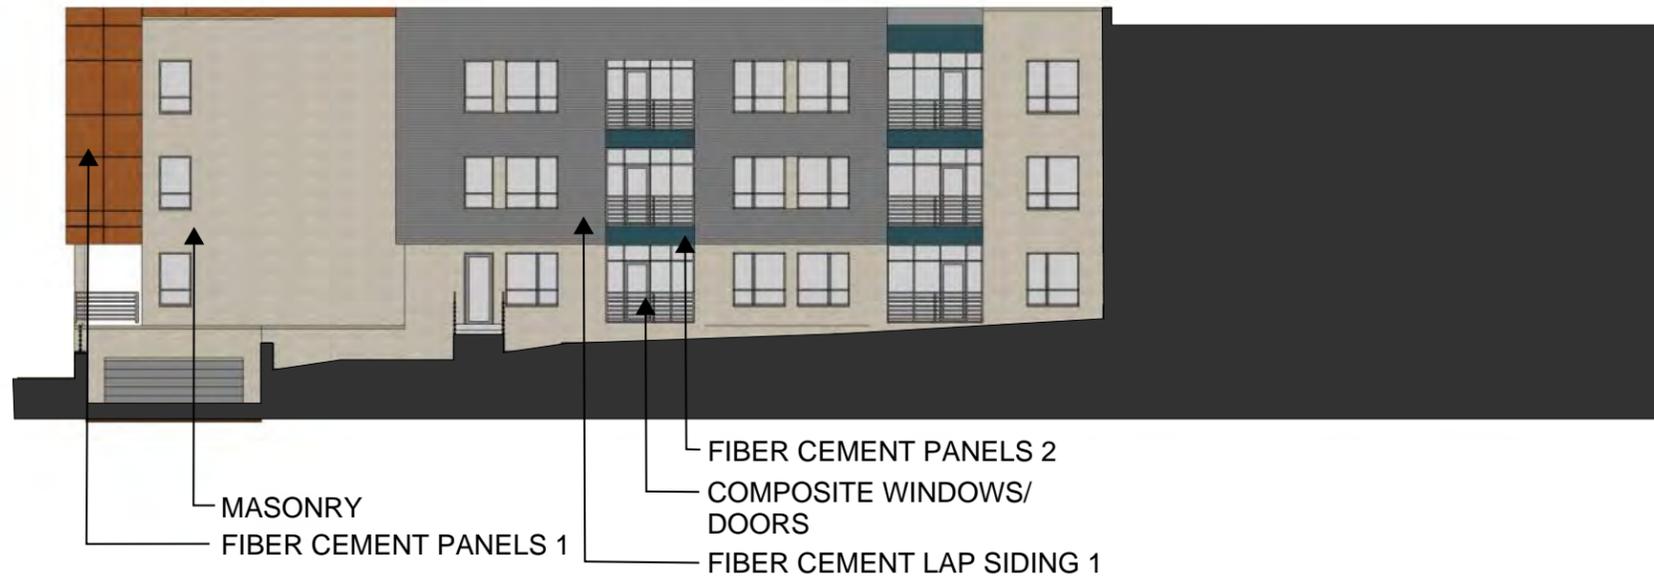


**JLA**  
ARCHITECTS

# MOVIN OUT - GLEN GROVE APARTMENTS

## COURTYARD SOUTH ELEVATIONS

DESCRIPTION	MANUFACTURER	TYPE / STYLE	DIMENSION	COLOR	NOTES
Fiber Cement Panel - 1	James Hardie	Select Cedarmill	4' x 8'	Woodtone Mountain Cedar	
Fiber Cement Panel - 2	James Hardie	Smooth	4' x 8'	Evening Blue	
Fiber Cement Panel - 3	James Hardie	Smooth	4' x 8'	Grey	
Fiber Cement Lap Siding - 1	James Hardie	Select Cedarmill	TBD	Aged Pewter	
Composite Windows/Doors	Lindsay Windows	Vinyl	TBD	Black/Bronze	
Masonry - 1	Interstate Brick	Utility	TBD	Ash	
HVAC Louver	TBD	Vented	TBD	TBD	
Balcony Fascia + Trim	TBD	TBD	TBD	TBD	
Balcony Railing	TBD	TBD	TBD	TBD	
Metal Wall Cap	TBD	TBD	TBD	TBD	

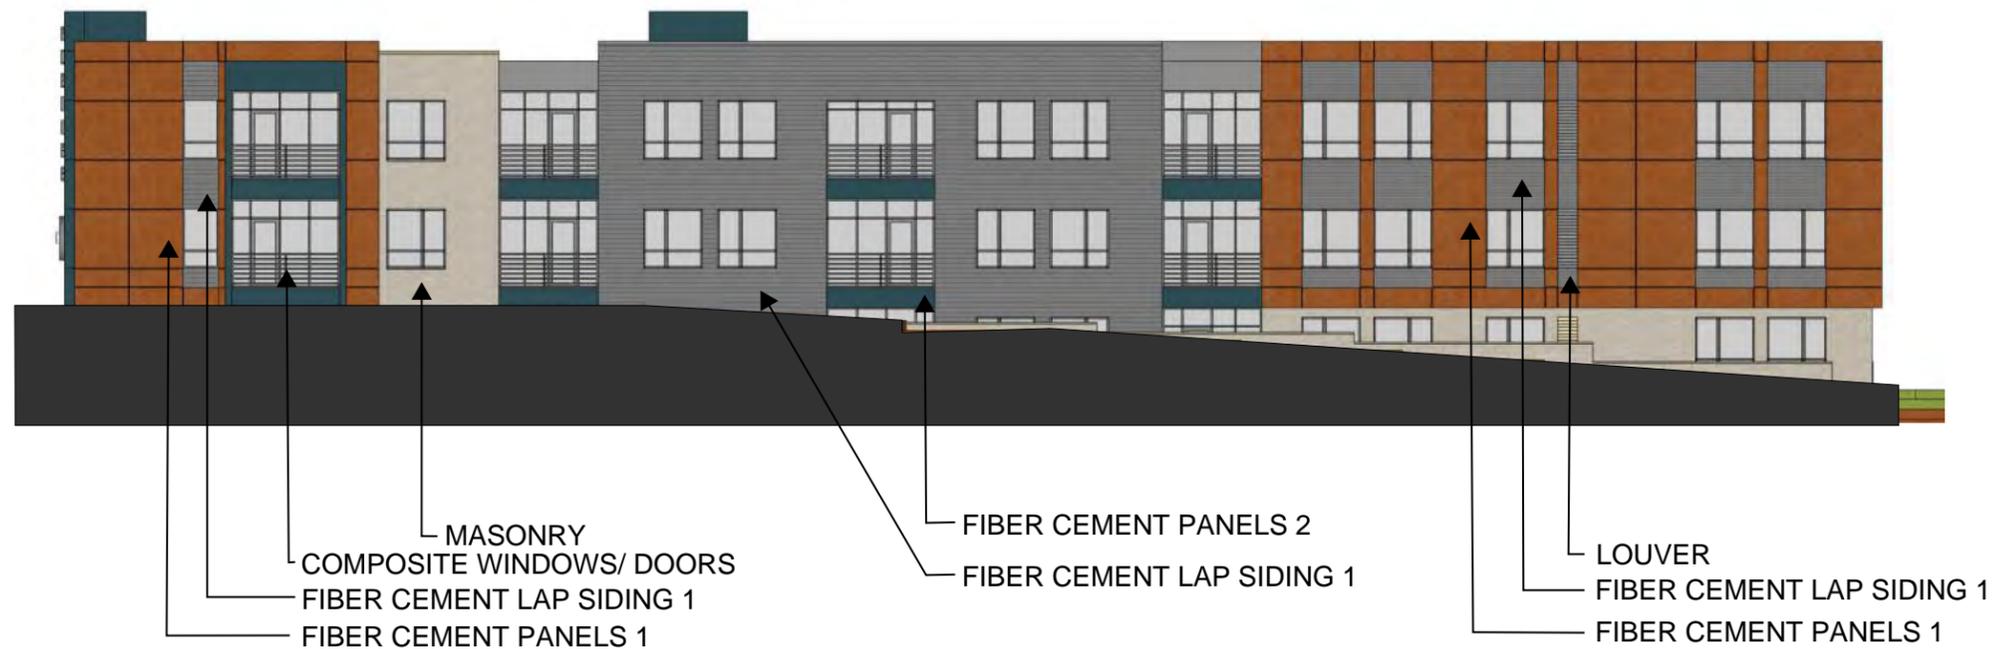


**JLA**  
ARCHITECTS

# MOVIN OUT - GLEN GROVE APARTMENTS

## NORTH ELEVATIONS

DESCRIPTION	MANUFACTURER	TYPE / STYLE	DIMENSION	COLOR	NOTES
Fiber Cement Panel - 1	James Hardie	Select Cedarmill	4' x 8'	Woodtone Mountain Cedar	
Fiber Cement Panel - 2	James Hardie	Smooth	4' x 8'	Evening Blue	
Fiber Cement Panel - 3	James Hardie	Smooth	4' x 8'	Grey	
Fiber Cement Lap Siding - 1	James Hardie	Select Cedarmill	TBD	Aged Pewter	
Composite Windows/Doors	Lindsay Windows	Vinyl	TBD	Black/Bronze	
Masonry - 1	Interstate Brick	Utility	TBD	Ash	
HVAC Louver	TBD	Vented	TBD	TBD	
Balcony Fascia + Trim	TBD	TBD	TBD	TBD	
Balcony Railing	TBD	TBD	TBD	TBD	
Metal Wall Cap	TBD	TBD	TBD	TBD	

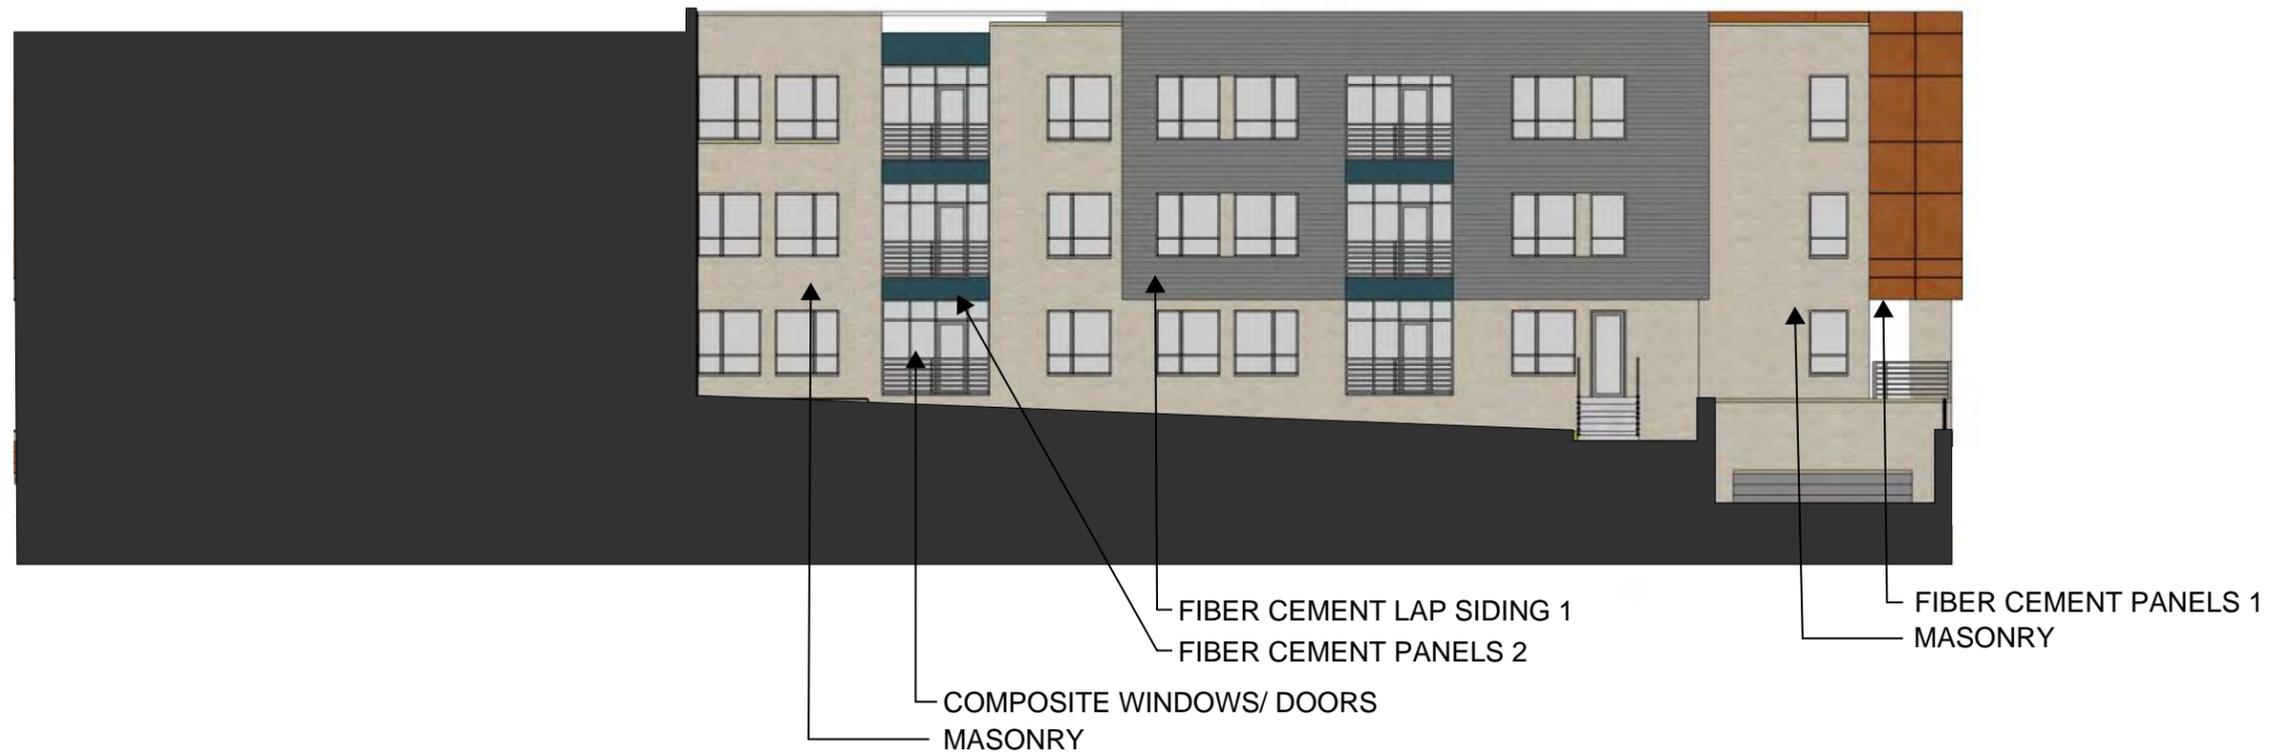

**JLA**  
ARCHITECTS

# MOVIN OUT - GLEN GROVE APARTMENTS

## COURTYARD NORTH ELEVATIONS



**JLA**  
ARCHITECTS

# MOVIN OUT - GLEN GROVE APARTMENTS

---

## PERSPECTIVES



**JLA**  
ARCHITECTS

# MOVIN OUT -GLEN GROVE APARTMENTS

---

## PERSPECTIVES



**JLA**  
ARCHITECTS

# MOVIN OUT - GLEN GROVE APARTMENTS

---

## PERSPECTIVES




**JLA**  
ARCHITECTS

# MOVIN OUT - GLEN GROVE APARTMENTS


---

## PERSPECTIVES

APPENDIX 'E'  
PRECISE IMPLEMENTATION PLAN  
CONCEPTUAL SIGNAGE & LIGHTING

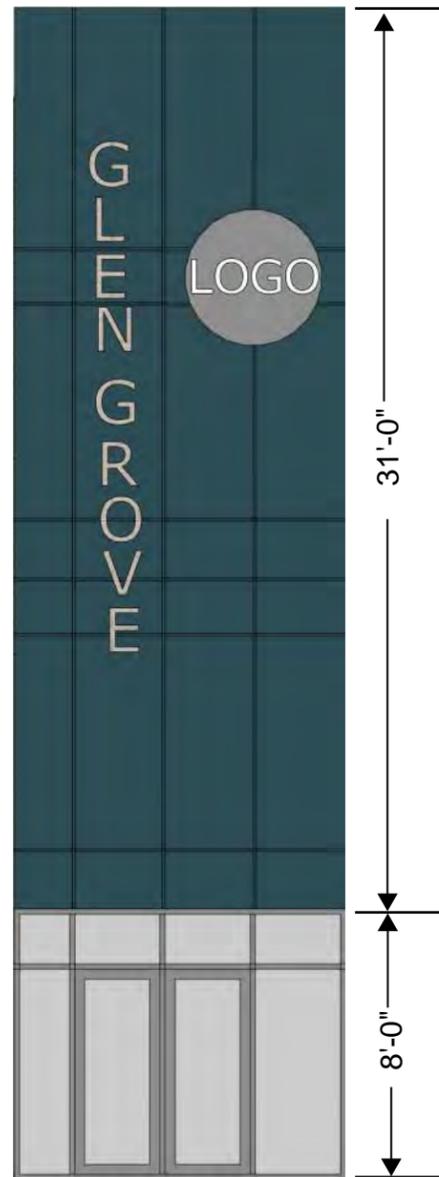

① SINAGE AT WEST ENTRY

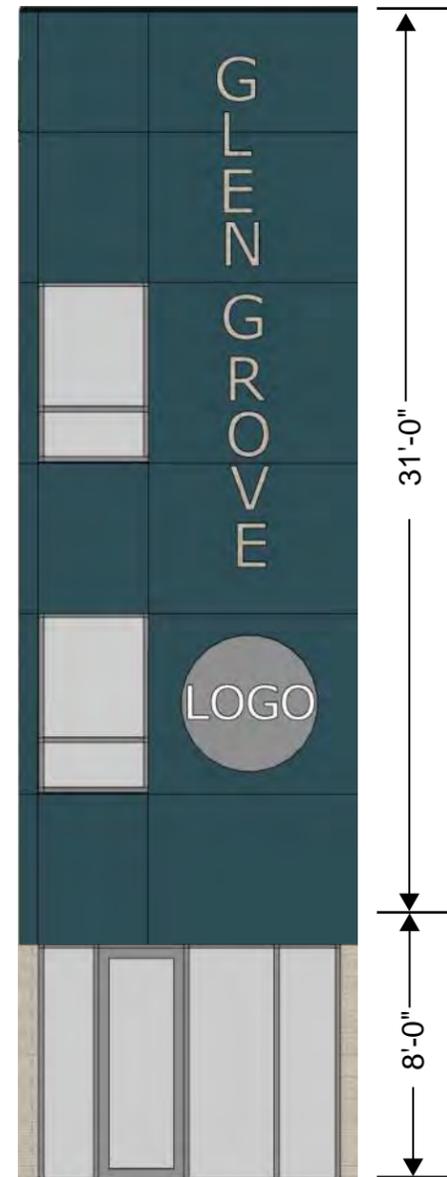

② SINAGE AT EAST ENTRY

FINAL SINAGE SUBJECT TO PERMITAL



**JLA**  
ARCHITECTS

# MOVIN OUT - GLEN GROVE APARTMENTS

---

## MONUMENT ELEVATION

# CONCEPTUAL

## SIERRA 4000 G LED

Specification

Pure in form yet bold in statement, Sierra provides a striking appearance, day or night. The translucent matte acrylic lens diffuses light uniformly along its length through direct and indirect reflector elements. Extruded aluminum body features a horizontal cut at the transition to the lens. Illuminated column in ceramic metal halide lamp is top mounted in the cap for easy relamping and increased efficiency. RGBW model is for visual accenting only. Electrical assembly is housed in a weatherproof enclosure, accessible through the handhole. A complementary low-level bollard is also available.

Luminaire Schedule  
Label  
BC

.hess



Model	Lamp	Color Temperature	Volt	Pole	Finish	Option
SE4000G	LED	WW - 3000K	UNV - 120-277V	13RB - 13' Column	SG - Silver Grey	DIM - 0-10vDC Dimming
		NW - 4000K		16RB - 16' Column	DG - Dark Grey	EFBC - External flange with base cover and anchor bolts
		R - Red			GG - Graphite Grey	N - None
		G - Green			BLK - Matte Black	
		B - Blue			BRZ - Dark Bronze	
		RB - Royal Blue			CC - Custom Color	
		A - Amber				

### Ordering Information

Specifications are subject to change without notification

HessAmerica > Products > Lighting Products > Illuminating Columns > SIERRA 4000 G  
[https://www.hessamerica.com/Products/Lighting/Illuminating\\_Columns/SIERRA\\_4000\\_G/](https://www.hessamerica.com/Products/Lighting/Illuminating_Columns/SIERRA_4000_G/)

**SIERRA 4000 G LED**

Specification

## DESCRIPTION

Contemporary LED light column for pathway or area illumination.

## HOUSING

Cylindrical base with horizontal cut at top of shaft is constructed from 0.197" nominal wall, 6082 aluminum tubing. Hand hole cover is plasma cut with kerf not to exceed 1/8" and includes triangular tamper-resistant locking device. Cylindrical lens is impact-resistant matte acrylic. Lens assembly is secured with stainless steel socket head cap screws from inside the base. Fabricated aluminum top cap is gasketed to create a weather-tight seal to the lens. Top cap is secured to the lens with two socket head cap screws. Nominal column height is 13' or 16'.

## OPTICS

LED column designed for pathway or area illumination. Cylindrical lens is impact-resistant, non-yellowing, matte acrylic. Lens shall have excellent diffusion properties to produce homogeneous, uniform horizontal and vertical distribution. The textured lens surface is fingerprint and scratch resistant for enhanced service life.

Single high-power white LED engine is mounted at the base of the matte acrylic cylindrical lens. The LED, combined with a high-efficiency reflector, projects light upward onto specular reflector located in the top cap to provide even illumination of the lens.

Single color LED models consist of an array of nine 3 watt high brightness LEDs arranged in a circular pattern mounted at the base of the matte acrylic cylindrical lens. LEDs fitted with narrow beam lenses project light upward onto the specular reflector located in the top cap to provide even illumination of the cylindrical lens.

## ELECTRICAL

Universal LED driver is mounted in a weather-proof enclosure at the base of the column. Input voltage to universal driver is 120v through 277v AC, 50/60 Hz.

## BUG RATING

B1-U4-G2 for all white LED models

## DELIVERED LUMEN OUTPUT (WHITE) / POWER CONSUMPTION

3000K: 3738 lumens / 37 watts

4000K: 3831 lumens / 37 watts

## LED LUMEN OUTPUT (Not Delivered) / POWER CONSUMPTION

Blue: 330 lumens / 41 watts

Royal Blue: 3820 mW / 41 watts

Green: 737 lumens / 41 watts

Red: 337 lumens / 30 watts

Amber: 220 lumens / 30 watts

## MOUNTING

Standard mounting is internal flange with anchor bolts consisting of four hot-dip galvanized anchor bolts ( $\varnothing 5/8"$  x 18" x 3") with two leveling nuts and washers per bolt. Optional mounting for external flange with anchor bolts and base cover. Base cover is fabricated from 0.080" spun aluminum and finished to match luminaire. Four hot-dip galvanized anchor bolts ( $\varnothing 1/2"$  x 15" x 3") with two leveling nuts and washers per bolt. Anchor bolts may be pre-shipped in advance upon request.

WEIGHT: 13' column = 80lbs / 16' column =

EPA: 13' column = 7.75 sq. ft / 16' column = 9.6 sq.ft.

Specifications are subject to change without notification

HessAmerica > Products > Lighting Products > Illuminating Columns > SIERRA 4000 G

[https://www.hessamerica.com/Products/Lighting/Illuminating\\_Columns/SIERRA\\_4000\\_G/](https://www.hessamerica.com/Products/Lighting/Illuminating_Columns/SIERRA_4000_G/)

CONCEPTUAL

.hess

**FINISH**

Standard finishes are finely textured matte silver grey metallic, dark grey, graphite grey, matte black, or dark bronze. Special colors available on request.

**WARRANTY**

Limited product warranty period including LEDs is five years. Driver shall carry the manufacturer's limited warranty.


Specifications are subject to change without notification

HessAmerica › Products › Lighting Products › Illuminating Columns › SIERRA 4000 G  
[https://www.hessamerica.com/Products/Lighting/Illuminating\\_Columns/SIERRA\\_4000\\_G/](https://www.hessamerica.com/Products/Lighting/Illuminating_Columns/SIERRA_4000_G/)


Page 3

## Additional information

### Dimensions

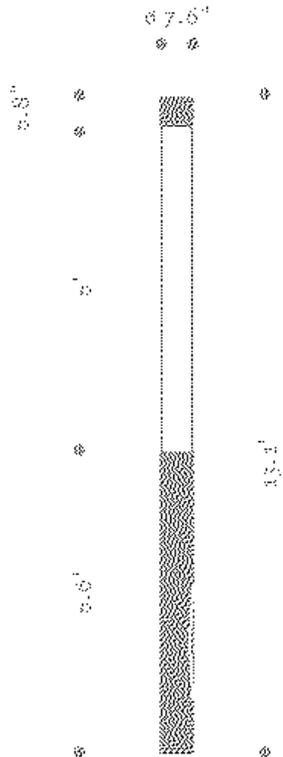

### Mounting detail

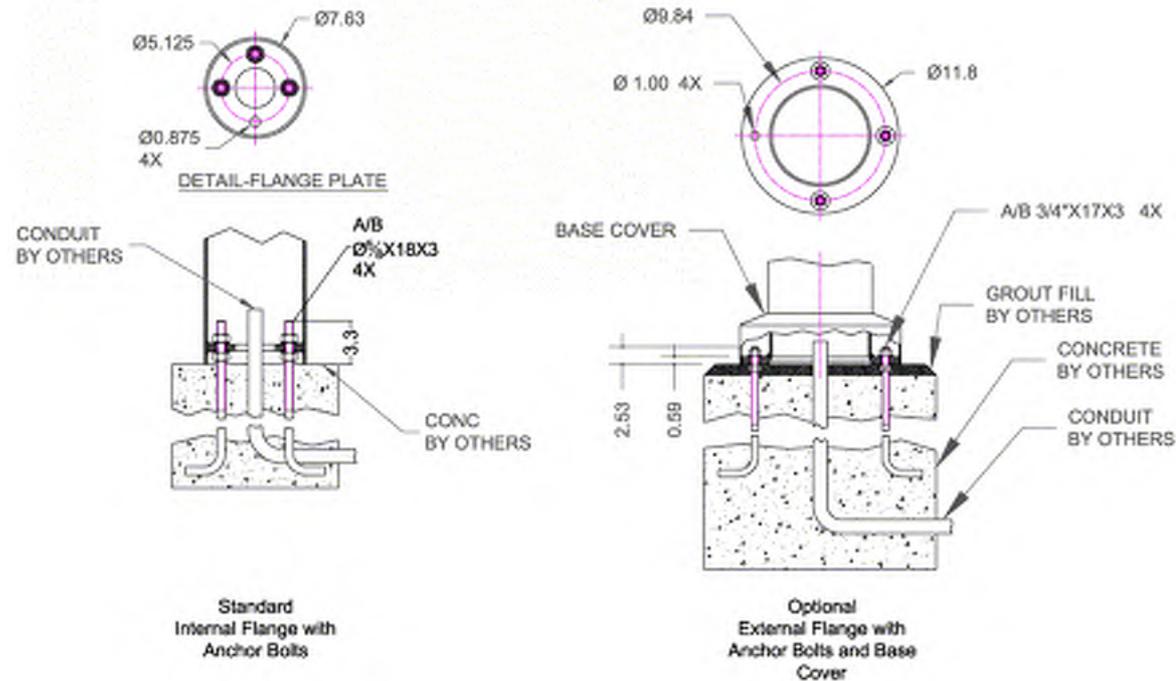

Specifications are subject to change without notification

Date: \_\_\_\_\_ Customer: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Type: \_\_\_\_\_ Qty: \_\_\_\_\_



Saturn Cutoff LED



Luminaire Schedule  
Label  
P3 P4 P5

Order Code: SACL

Pole Order Code:

	Series	Height	Finish	Options					
<u>SACL</u>	SACL Saturn Cutoff LED	P3	P4	P5					
Optics	R1 Type I	R2 Type II	R3 Type III	R3W Type III (Wide)	R4 Type IV	R5R Type V (Round)	R5S Type V (Square)	R5Q Type V (Rectangular)	
Mounting	1 Single	1A Single Arm Mount	2 Double	W Wall Mount					
Light Engine	5G450 39W/4442lm	5G700 62W/6644lm	5G105 93W/9241lm						<sup>1</sup> Based on R1 distribution in 3000K CCT
CCT	27 <sup>1</sup> 2700K	30 <sup>1</sup> 3000K	40 4000K						<sup>1</sup> IDA Approved <sup>2</sup> For other CCT please consult factory
Power Cord Length	8* 8'	10* 10'	12* 12'	14* 14'	16* 16'	18* 18'	XX* XX'		<sup>3</sup> For 1 mounting use the pole height. For 1A or 2 mounting use the pole height +2
Finish	WH White	BK Black	BL Semi-Matte Black	BZ Bronze	SV Silver	SP Specify Premium Color			
Voltage	UNV 120- 277	120 120V	240 240V	277 277V	347 <sup>2</sup> 347V	480 <sup>2</sup> 480V			<sup>2</sup> Equipped with step-down transformer
Options	DM <sup>4</sup> Dimming (0-10V)	HS <sup>3</sup> House Side Shield (180°)	HL30 <sup>4,5</sup> Hi-Lo Switching Low Output 30%	HL50 <sup>4,5</sup> Hi-Lo Switching Low Output 50%	DS No Uplight Finish	PCT Photocell Tenon			<sup>3</sup> Type I, II, III, and IV only <sup>4</sup> DM, HLXX, TLR or IMS only. Cannot be combined. <sup>5</sup> 120V, 240V or 277V only <sup>6</sup> Only available at 120/230/240/277V. Consult factory for 208/347/480V.
	Pole Motion Sensor <sup>6</sup> with optional photocell See page 3 for order code								

Product Modifications

Please list modification requirements for review by factory:


CONCEPTUAL

Approvals

Date:



## SACL-1-XX-DS

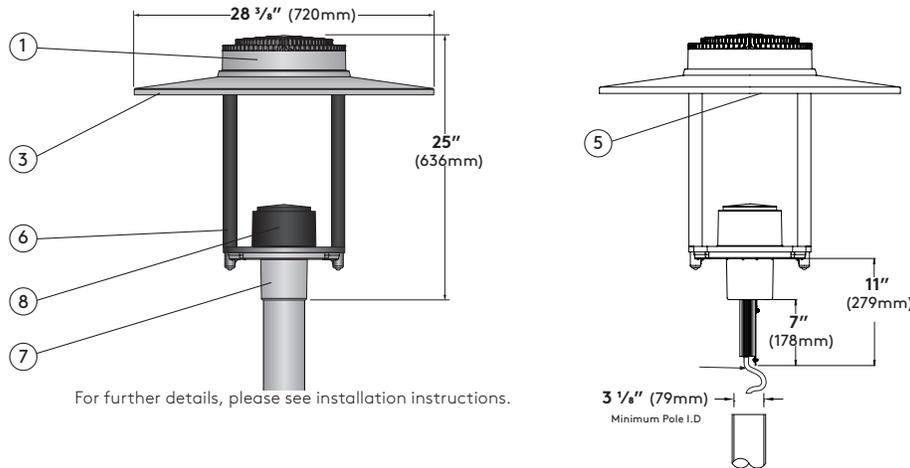

For further details, please see installation instructions.

### Specifications

**1. Luminaire Cover** - Die cast aluminum cover made from low copper alloy, designed to ensure optimal thermal management for extra long life time of LED light engine.

**2. Gasketing** - (not shown) Continuous gasket provides weatherproofing, dust and insect control at all fixture connections.

**3. Luminaire Hood** - Aluminum shade with white painted interior.

**4. LED Array** - (not shown) High flux LEDs mounted to PC boards and attached to aluminum heat sink for maximum LED performance and life. CCT tolerance 1/4 step binning for 3000K, and 4000K. CRI minimum 80. Complete light engine can be removed easily for future upgrade. LED light engine provides a reported lumen maintenance of 93% at 50,000 hours. L70 calculated greater than 100,000 hours..

**5. LED Optics** - Technical Optics (R1, R2, R3, R3W, R4, R5S, R5Q and R5R) use Selux signature light pattern acrylic lens holder to secure proprietary silicone optics. Internal micro house side shield available for distributions types I, II, III & IV. Clear glass option as well as flat diffuse, and diffuse bowl.

**6. LED Driver** - (not shown) LEDs are driven by RoHS compliant constant current programmable LED driver. Driver includes 0-10V dimming to 10%, meets the requirements of IP66. Driver assembly located inside the head.

**7. Hood Supports** - Two aluminum arms support shade and optic assembly and attach to the die cast aluminum pole fitter (shown painted matte black for DS option).

**8. Pole Fitter** - Self-leveling, die-cast low-copper aluminum alloy, fitter base secured to pole with three, stainless steel, Allen head set screws. Fitter for 3 1/2" (90mm) O.D. poles.

**9. Driver cover** - Die cast aluminum cover made from low copper alloy, removes for tool-less access to driver. Driver secured to removable tray for ease of maintenance (shown painted matte black for DS option).

**10. Surge Protector** - (not shown) Designed to protect luminaire from electrical surge (20kA).

**11. Power Cord** - (not shown) Pre-installed at factory. Please specify power cord length in accordance to height of the pole. Add 2 feet to power cord length if double mounting (2) is specified.

**Exterior Luminaire Finish** - Selux utilizes a high quality Polyester Powder Coating. All Selux luminaires and poles are finished in our Tiger Drylac certified facility and undergo a five stage intensive pretreatment process where product is thoroughly cleaned, phosphated and sealed. Selux powder coated products provide excellent salt and humidity resistance as well as ultraviolet resistance for color retention. All products are tested in accordance with test specifications for coatings from ASTM and PCI. Standard exterior colors are White (WH), Black (BK), Semi-Matte Black (BL), Bronze (BZ), and Silver (SV). Selux premium colors (SP) are available, please specify from your Selux color selection guide.

### 5 Year Limited LED Luminaire Warranty -

Selux offers a 5 Year Limited Warranty to the original purchaser that the Saturn Cutoff LED luminaire shall be free from defects in material and workmanship for up to five (5) years from date of shipment. This limited warranty covers the LED driver and LED array when installed and operated according to Selux instructions. For details, see "Selux Terms and Condition of Sale."

**Listings and Ratings:** Luminaire and LED tested to IP65 and IESNA LM-79-08 standards. LED tested to LM-80 standards. Luminaire and LED tested at 25°C ambient temperature.

**Luminaire suitable for ambient temperature of 45°C. Minimum operating temperature of luminaire at -40°C (-40°F)**

**NRTL Listed (i.e. UL, CSA)**


**Visit [selux.us](http://selux.us) for our LED End of Life recycling policy.**

# CONCEPTUAL

## Pole Motion Sensor

The Selux outdoor rated sensor incorporates Passive Infrared (PIR) Technology for motion sensing and also includes a built in photocell. Designed to mount to a single gang faceplate on a pole/column, the FSP-211 utilizes 100% Digital Passive Infrared (PIR) Technology that is tuned for walking size tasks while preventing false tripping from the environment.

Series	Optics	Hand Hole Orientation	Voltage
MS Motion Sensor	1 270° coverage - Single Sensor	<b>00</b> 0° Clockwise from handhole	<b>UNV</b> (120-277V)
		<b>09</b> 90° Clockwise from handhole	<b>347</b> (347V*)
		<b>18</b> 180° Clockwise from handhole	<b>480</b> (480V*)
		<b>27</b> 170° Clockwise from handhole	* Consult factory for 347V and 480V

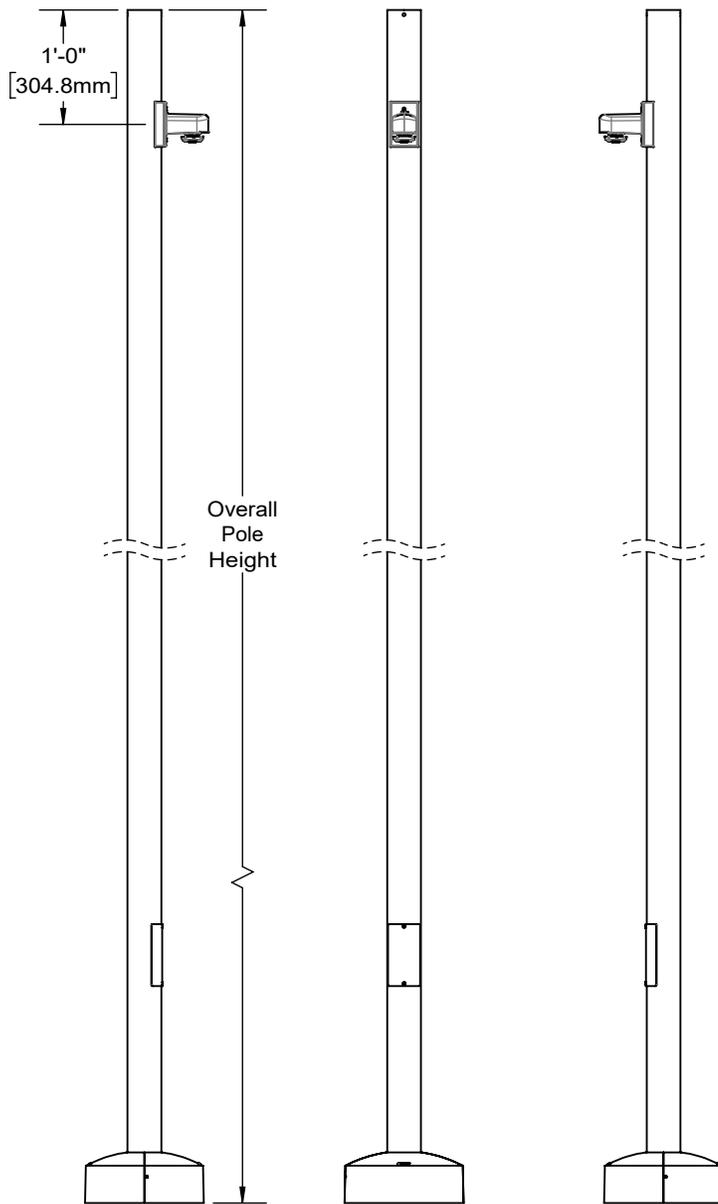

### Factory Defaults:

**Time Delay:** 5 minutes


**Cutoff:** 1 hour

**Sensitivity:** Maximum


**Ramp Up Time:** Disabled

**Photo Cell:** Disabled

**Factory Programming:** Consult Factory

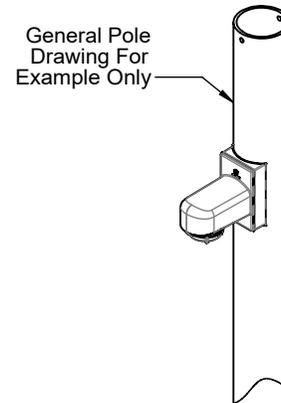

Sensor angular orientation from hand hole 0°  
90° increments clockwise around pole (Type 00, 09, 18, 27 )

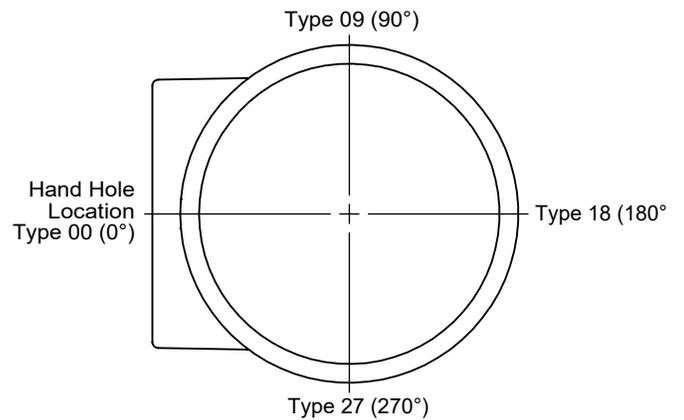

CONCEPTUAL


Mounting

Single (1)

Die-cast aluminum fitter base secured to pole with three stainless steel, Allen head set screws.

EPA = 1.3ft<sup>2</sup> (0.12m<sup>2</sup>)

Weight = 39lbs. (17.7kg)

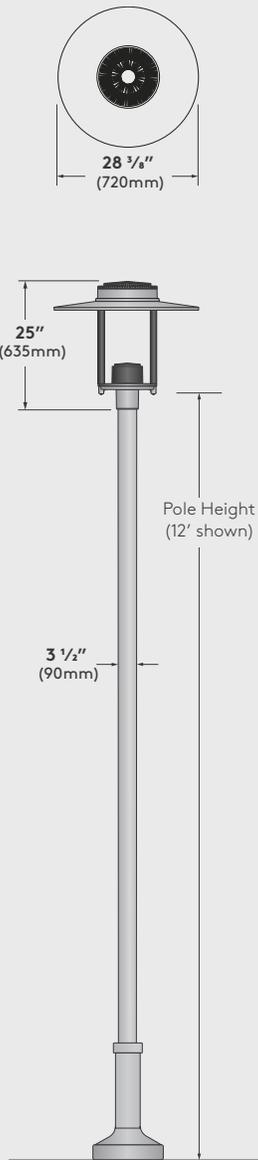

Single Arm Mount (1A)

Die-cast aluminum single luminaire mounting arm secured to pole with four stainless steel, Allen head set screws. Outer slip fitter for 3 1/2" O.D. tenon.

EPA = 2.3ft<sup>2</sup> (0.21m<sup>2</sup>)

Weight = 53lbs. (24.0kg)




Double (2)

Die-cast aluminum double luminaire mounting arm secured to pole with four stainless steel, Allen head set screws. Outer slip fitter for 3 1/2" O.D. tenon.

EPA = 4.2ft<sup>2</sup> (0.39m<sup>2</sup>)

Weight = 100lbs. (45.3kg)

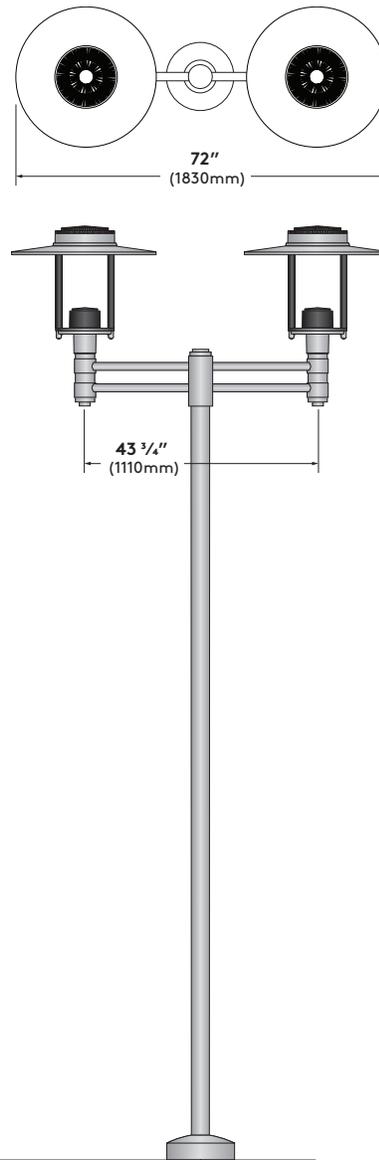


Wall (W)

Die-cast aluminum double round wall mount arm. Secured to wall with 1/4" diameter threaded fasteners (by others).


EPA = 2.1ft<sup>2</sup> (0.20m<sup>2</sup>)

Weight = 50lbs. (22.7kg)

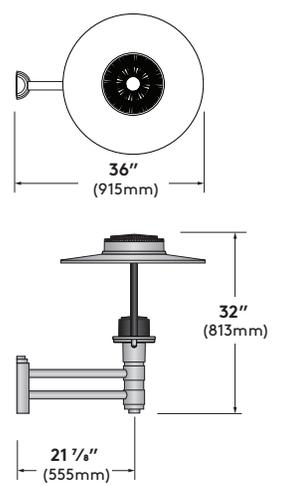

Wall Arm Mounting Detail

(Conduit and mounting hardware by others).

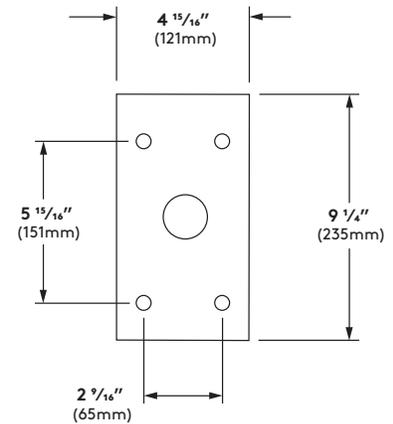




# WEDGE1 LED

## Architectural Wall Sconce



Luminaire Schedule Label W1

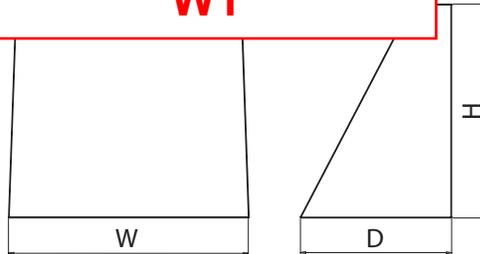

### Specifications

**Depth:** 5.5"  
**Height:** 8"  
**Width:** 9"  
**Weight:** 9 lbs  
 (without options)

Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

### Introduction

The WEDGE LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean rectilinear design comes in four sizes with lumen packages ranging from 1,200 to 25,000 lumens, providing true site-wide solution.

WEDGE1 delivers up to 2,000 lumens with a soft, non-pixelated light source, creating a visually comfortable environment. The compact size of WEDGE1, with its integrated emergency battery backup option, makes it an ideal over-the-door wall-mounted lighting solution.

### WEDGE LED Family Overview

Luminaire	Standard EM, 0°C	Cold EM, -20°C	Sensor	Lumens (4000K)					
				P1	P2	P3	P4	P5	P6
WEDGE1 LED	4W	--	--	1,200	2,000	--	--	--	--
WEDGE2 LED	10W	18W	Standalone / nLight	1,200	2,000	3,000	4,500	6,000	--
WEDGE3 LED	15W	18W	Standalone / nLight	7,500	8,500	10,000	12,000	--	--
WEDGE4 LED	--	--	Standalone / nLight	12,000	16,000	18,000	20,000	22,000	25,000

### Ordering Information

**EXAMPLE: WEDGE1 LED P2 40K 80CRI VF MVOLT PE DDBXD**

Series	Package	Color Temperature	CRI	Distribution	Voltage	Mounting
WEDGE1 LED	P1 P2	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K <sup>1</sup> 5000K	80CRI 90CRI	VF Visual comfort forward throw VW Visual comfort wide	MVOLT 347 <sup>2</sup>	<b>Shipped included</b> SRM Surface mounting bracket  <b>Shipped separately</b> AWS 3/8inch Architectural wall spacer BBW Surface-mounted back box PBBW Premium surface-mounted back box (top, left, right conduit entry)

Options	Finish
E4WH <sup>3</sup> Emergency battery backup, CEC compliant (4W, 0°C min)	DDBXD Dark bronze
PE <sup>4</sup> Photocell, Button Type	DBLXD Black
DS Dual switching ( comes with 2 drivers and 2 light engines; see page 3 for details)	DNAXD Natural aluminum
DMG 0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately)	DWHXD White
BCE Bottom conduit entry for premium back box (PBBW). Total of 4 entry points.	DSSXD Sandstone
	DDBTXD Textured dark bronze
	DBLTXD Textured black
	DNATXD Textured natural aluminum
	DWHGXD Textured white
	DSSTXD Textured sandstone

### Accessories

Ordered and shipped separately.

WEDGEAWS DDBXD U	WEDGE 3/8inch Architectural Wall Spacer (specify finish)
WEDGE1PBBW DDBXD U	WEDGE1 Premium surface-mounted back box (specify finish)
WSBBW DDBXD U	Surface - mounted back box (specify finish)

CONCEPTUAL

### NOTES

- 1 50K not available in 90CRI.
- 2 347V not available with E4WH, DS or PE.
- 3 E4WH not available with PE or DS.
- 4 PE not available with DS.



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
 © 2019-2020 Acuity Brands Lighting, Inc. All rights reserved.

WEDGE1 LED  
 Rev. 01/07/20

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	Dist. Type	27K (2700K, 80 CRI)		30K (3000K, 80 CRI)		35K (3500K, 80 CRI)		40K (4000K, 80 CRI)		50K (5000K, 80 CRI)	
			Lumens	LPW								
P1	10W	VF	1,120	112	1,161	116	1,194	119	1,227	123	1,235	123
		VW	1,122	112	1,163	116	1,196	120	1,229	123	1,237	124
P2	15W	VF	1,806	120	1,872	125	1,925	128	1,978	132	1,992	133
		VW	1,809	120	1,876	125	1,929	128	1,982	132	1,996	133

### Electrical Load

Performance Package	System Watts	Current (A)				
		120V	208V	240V	277V	347V
P1	10W	0.082	0.049	0.043	0.038	--
	13W	--	--	--	--	0.046
P2	15W	0.132	0.081	0.072	0.064	--
	18W	--	--	--	--	0.056

### Lumen Multiplier for 90CRI

CCT	Multiplier
27K	0.845
30K	0.867
35K	0.845
40K	0.885
50K	0.898

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier
0°C / 32°F	1.03
10°C / 50°F	1.02
20°C / 68°F	1.01
25°C / 77°F	1.00
30°C / 86°F	0.99
40°C / 104°F	0.98

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>0.96	>0.95	>0.91

CONCEPTUAL


## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting WDGE LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.

### LEGEND



MH = 8ft  
Grid = 8ft x 8ft

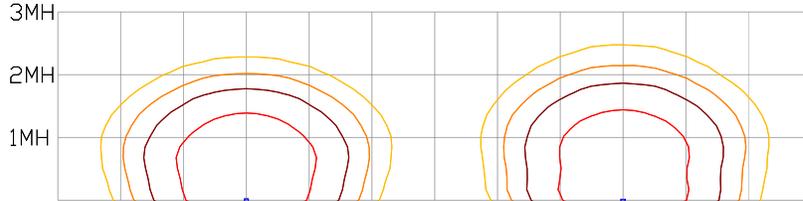

WDGE1 LED P2 40K 80CRI VW

WDGE1 LED P2 40K 80CRI VF


## Emergency Egress Options

### Emergency Battery Backup

The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency battery backup configurations include an independent secondary driver with an integral relay to immediately detect loss of normal power and automatically energize the luminaire. The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time normal power is lost and maintain a minimum of 60% of the light output at the end of 90minutes.

Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9

The example below shows illuminance of 1 fc average and 0.1 fc minimum in emergency mode with E4WH and VF distribution.

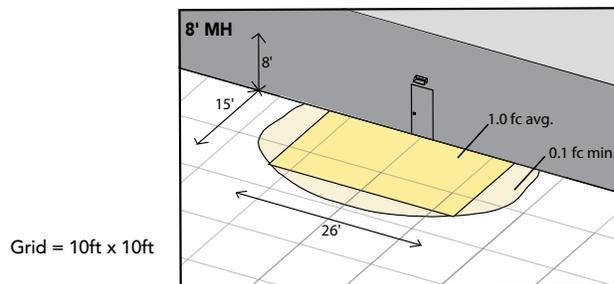


WDGE1 LED xx 40K 80CRI VF MVOLT E4WH

### Dual Switching (DS) Option

The dual switching option offers operational redundancy that certain codes require. With this option the luminaire comes integrated with two drivers and two light engines. These work completely independent to each other so that a failure of any individual component does not cause the whole luminaire to go dark. This option is typically used with a back generator or inverter providing emergency power.

Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9

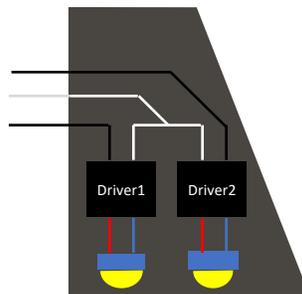

CONCEPTUAL



**E4WH – 4W Emergency Battery Backup**

D = 5.5"  
H = 8"  
W = 9"



**PBBW – Premium Back Box**

D = 1.75"  
H = 8"  
W = 9"

**CONCEPTUAL**



**BBW – Standard Back Box**

D = 1.5"  
H = 4"  
W = 5.5"



**AWS – 3/8inch Architectural Wall Spacer**

D = 0.38"  
H = 4.4"  
W = 7.5"

## FEATURES & SPECIFICATIONS

### INTENDED USE

Common architectural look, with clean rectilinear shape, of the WEDGE LED was designed to blend with any type of construction, whether it be tilt-up, frame or brick. Applications include commercial offices, warehouses, hospitals, schools, malls, restaurants, and other commercial buildings.

### CONSTRUCTION

The single-piece die-cast aluminum housing integrates secondary heat sinks to optimize thermal transfer from the internal light engine heat sinks and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP66 rating for the luminaire.

### FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

### OPTICS

Well crafted reflector optics allow the light engine to be recessed within the luminaire, providing visual comfort, superior distribution, uniformity, and spacing in wall-mount applications. The WEDGE LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine consists of high-efficiency LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L91/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%. Luminaire comes with built in 6kV surge protection, which meets a minimum Category C low exposure (per ANSI/IEEE C62.41.2).

### INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections. The 3/8" Architectural Wall Spacer (AWS) can be used to create a floating appearance or to accommodate small imperfections in the wall surface.

### LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP66 rated. PIR options are rated for wet location. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/support/customer-support/terms-and-conditions](http://www.acuitybrands.com/support/customer-support/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.